



**MCOTS-N-12-Q3P1N-QT**  
**Quad Output**  
**Quarter-Brick**

**Military COTS Non-Isolated DC-DC Converters**

|                                   |                                       |                                    |   |                              |
|-----------------------------------|---------------------------------------|------------------------------------|---|------------------------------|
| <b>6-15 V</b><br>Continuous Input | <b>0.8V to 5V</b><br>Positive Outputs | <b>30A</b><br>Each Positive Output | <b>-3.0V to -13.5V</b><br>Negative Output | <b>1A</b><br>Negative Output |
|-----------------------------------|---------------------------------------|------------------------------------|---|------------------------------|

The MCOTS-N QUAD Output non-isolated dc-dc converter employs synchronous rectification to achieve extremely high conversion efficiency in a quarter brick package. The module generates three positive output voltages, and one negative output voltage. The MCOTS-N QUAD Output Brick converter can be used in traditional DPA (distributed power architecture) systems that require a more rugged design. All four outputs have a wide output trim range, creating a high degree of flexibility for the user.

*Mil***COTS™**



Designed and manufactured in the USA

**Operational Features**

- High efficiency, up to 93% at full rated load current
- Delivers up to 30A on each positive output and 1A on the negative output
- Input Voltage Range: 6-15 Vdc
- Output Voltage Range:  
 positive outputs: 0.8V to 5V,  
 negative output: -3.0V to -13.5V

**Protection Features**

- Over-current shutdown (all outputs)
- Thermal shutdown (all outputs)
- Over-voltage shutdown (positive outputs only)
- Input under-voltage lockout (positive outputs only)

**Control Features**

- On/Off control for each output
- Output voltage trim for each output permits custom voltages
- Remote Sense (positive outputs only)

**Mechanical Features**

- Quarter-brick form factor.
- Standard size: 1.54" x 2.39" x 0.50"  
 (39.0 x 60.6 x 12.7 mm)
- Weight: 3.27oz. (93g)

**Screening / Qualification**

- AS9100 and ISO 9001 certified facility
- Qualified to MIL-STD-810
- Available with S-Grade or M-Grade screening
- Pre-cap inspection per IPC-610, Class III
- Temperature cycling per MIL-STD-883, Method 1010, Condition B, 10 cycles
- Final visual inspection per MIL-STD-883, Method 2009
- Full component traceability


**Contents**

|  | Page No |
|--|---------|
| Technical Connection Diagram . . . . .   | 2       |
| Technical Specification . . . . .        | 3       |
| Application Section . . . . .            | 8       |
| Encased Mechanical . . . . .             | 11      |
| Encased Mechanical with Flange . . . . . | 12      |
| Qualification & Screening . . . . .      | 13      |
| Ordering Information . . . . .           | 14      |



**MCOTS-N-12-Q3P1N-QT**  
**Quad Output**  
**Quarter-Brick**

**Technical Connection Diagram**

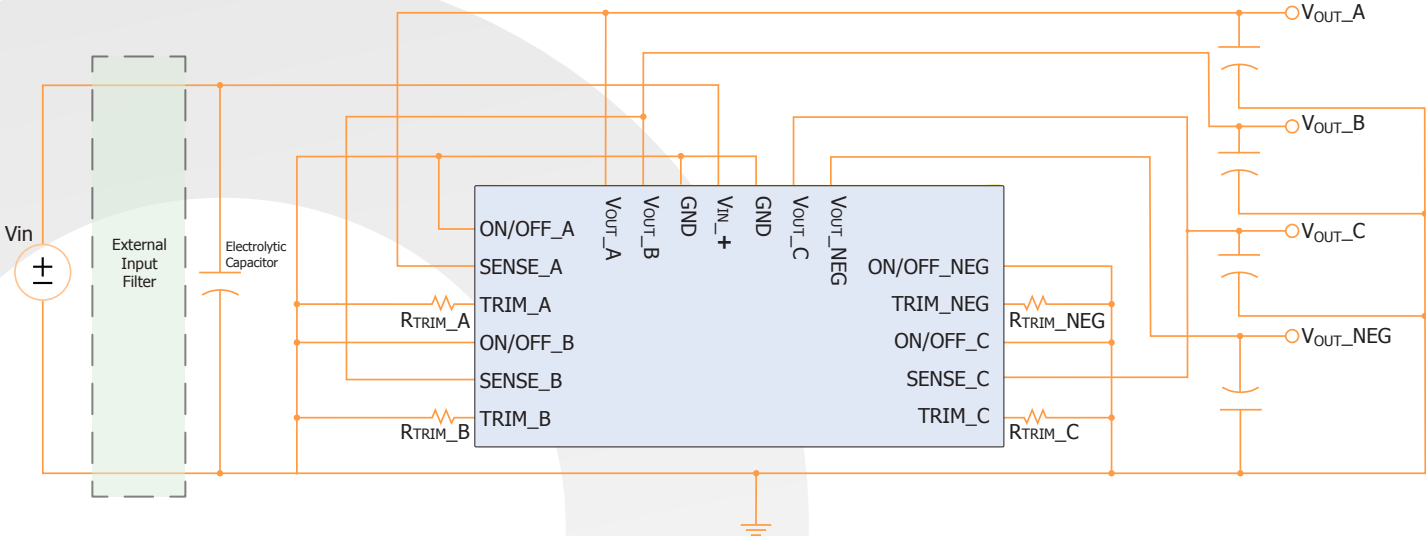

### Technical Specification

#### MCOTS-N-12-Q3P1N-QT ELECTRICAL CHARACTERISTICS

Ta = 25 °C, Vin = 12Vdc unless otherwise noted; full operating temperature range is -55 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

| Parameter                                   | Vout | Min.  | Typ.    | Max.   | Units | Notes & Conditions  |
|---|------|-------|---------|--------|-------|---|
| <b>ABSOLUTE MAXIMUM RATINGS</b>             |      |       |         |        |       |   |
| Input Voltage                               |      |       |         |        |       |   |
| Non-Operating                               | All  | 0     |         | 16     | V     | Continuous  |
| Operating                                   | All  |       |         | 15     | V     | Continuous  |
| Operating Temperature                       | All  | -55   |         | 100    | °C    | Baseplate temperature   |
| Storage Temperature                         | All  | -65   |         | 135    | °C    |   |
| Voltage at ON/OFF input pin                 | Pos  | -3    |         | 15     | V     | Main positive outputs   |
| "   | Neg  | 0     |         | 6      | V     | Auxiliary negative output                                       |
| <b>RECOMMENDED OPERATING CONDITIONS</b>     |      |       |         |        |       |   |
| Input Voltage Range                         | All  | 6     |         | 15     | V     | Continuous  |
| External Input Capacitance                  | All  | 100   |         |        | µF    | ESR < 1.5Ω  |
| Output Voltage                              | Pos  | 0.8   |         | 5.0    | V     | Main positive outputs   |
| "   | Neg  | -13.5 |         | -3.0   | V     | Auxiliary negative output                                       |
| Output Current                              | Pos  | 0     |         | 30     | A     | Each main positive output                                       |
| "   | Neg  | 0     |         | 1      | A     | Auxiliary negative output                                       |
| <b>INPUT CHARACTERISTICS</b>                |      |       |         |        |       |   |
| Input Under-Voltage Lockout                 |      |       |         |        |       |   |
| Turn-On Voltage Threshold                   | Pos  | 5.20  | 5.60    | 6.00   | V     | Main positive outputs   |
| Turn-Off Voltage Threshold                  | Pos  | 4.60  | 5.00    | 5.40   | V     | "   |
| Lockout Hysteresis                          | Pos  |       | 0.6     |        | V     | "   |
| Turn-On Voltage Threshold                   | Neg  | 5.60  | 5.80    | 6.00   | V     | Auxiliary negative output                                       |
| Turn-Off Voltage Threshold                  | Neg  |       |         | 2.60   | V     | Turn-off threshold for negative output varies based on setpoint |
| Maximum Input Current Limit                 | 1.8V |       |         | 10     | A     | Single output, 6Vin, 100% load                                  |
| "   | 3.3V |       |         | 18     | A     | "   |
| "   | 5.0V |       |         | 28     | A     | "   |
| No-Load Input Current                       | 1.8V |       | 102     |        | mA    | Single output, 12Vin  |
| "   | 3.3V |       | 156     |        | mA    | "   |
| "   | 5.0V |       | 234     |        | mA    | "   |
| Disabled Input Current                      |      |       | 16      |        | mA    |   |
| Input Reflected-Ripple Current              | 1.0V |       | 36      |        | mA    | Single output, 12Vin, 100% load, pk-pk value                    |
| "   | 2.5V |       | 68      |        | mA    | "   |
| "   | 5.0V |       | 98      |        | mA    | "   |
| <b>POSITIVE OUTPUT CHARACTERISTICS</b>      |      |       |         |        |       |   |
| Output Voltage Set Point                    | 0.8V | 0.79  | 0.80    | 0.81   | V     | 12Vin 50% load  |
| Output Voltage Range                        |      | 0.8   |         | 5.0    | V     | Main positive outputs   |
| Operating Output Current Range              |      | 0     |         | 30     | A     | "   |
| Output Voltage Regulation                   |      |       |         |        |       |   |
| Over Line                                   |      |       |         | 0.5    | %     | Main positive outputs, with sense pin                           |
| Over Load                                   |      |       |         | 0.6    | %     | "   |
| Over Temperature                            |      |       |         | 1      | %     | "   |
| Toal Output Voltage Range                   |      |       |         | 3      | %     | With sense pin, over sample, line, load, temp. & life           |
| Output Voltage Ripple and Noise (pk-pk\RMS) | 1.0V |       | 27\5.0  |        | mV    | Full load; 20MHz bandwidth                                      |
| "   | 2.5V |       | 43\11.6 |        | mV    | "   |
| "   | 5.0V |       | 67\20.4 |        | mV    | "   |
| Output DC Over Current Shutdown             |      |       | 40      |        | A     | 100°C baseplate temperature                                     |
| External Output Capacitance                 |      | 100   |         | 10,000 | µF    | ESR > 1 mΩ  |
| Input Voltage Ripple Rejection              |      |       | 50      |        | dB    | 120Hz   |
| <b>NEGATIVE OUTPUT CHARACTERISTICS</b>      |      |       |         |        |       |   |
| Output Voltage Range                        |      | -13.5 |         | -3.0   | V     |   |
| Operating Output Current Range              |      | 0     |         | 1      | A     |   |
| Output DC Over Current limit                |      |       | 1.8     |        | A     |   |
| External Output Capacitance                 |      | 100   |         | 10,000 | µF    | ESR > 1 mΩ  |



**Technical Specification**

**MCOTS-N-12-Q3P1N-QT ELECTRICAL CHARACTERISTICS (continued)**

Ta = 25 °C, Vin = 12Vdc unless otherwise noted; full operating temperature range is -55 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

| Parameter                                     | Vout | Min.  | Typ. | Max. | Units                | Notes & Conditions                          |
|---|------|-------|------|------|----------------------|---|
| <b>TEMP LIMITS FOR POWER DERATING</b>         |      |       |      |      |                      |   |
| Semiconductor Junction Temperature            | All  |       |      | 125  | °C                   | Package rated to 150 °C                     |
| Board Temperature                             | All  |       |      | 125  | °C                   | UL rated max operating temp 130 °C          |
| Baseplate Temperature                         | All  |       |      | 100  | °C                   |   |
| <b>FEATURE CHARACTERISTICS</b>                |      |       |      |      |                      |   |
| Switching Frequency                           | Pos  | 330   | 360  | 390  | kHz                  |   |
| "   | Neg  | 215   | 225  | 235  | kHz                  |   |
| ON/OFF Control                                |      |       |      |      |                      |   |
| Negative Logic (N) ON/OFF Control             |      |       |      |      |                      |   |
| Off-State Voltage                             | Pos  | 1.5   |      | 6.5  | V                    |   |
| On-State Voltage                              | Pos  | -3.0  |      | 0.6  | V                    |   |
| Pull-Up Voltage                               | Pos  |       | Vin  |      | V                    |   |
| Pull-Up Resitance                             | Pos  |       | 49.9 |      | kΩ                   |   |
| Off-State Voltage                             | Neg  | 2.4   |      | 6.0  | V                    |   |
| On-State Voltage                              | Neg  | 0.0   |      | 0.6  | V                    |   |
| Output Voltage Trim                           | Pos  | 0.8   |      | 5.0  | V                    | Measured output pin to ground pin           |
| "   | Neg  | -13.5 |      | -3.0 | V                    | "   |
| Output Over-Voltage Protection                | Pos  | 5.6   | 6.0  | 6.4  | V                    | Main positive outputs, over full temp range |
| Over-Temperature Shutdown                     | All  |       | 130  |      | °C                   | Average PCB Temperature                     |
| Over-Temperature Shutdown Restart Hysteresis  | All  |       | 10   |      | °C                   |   |
| <b>RELIABILITY CHARACTERISTICS</b>            |      |       |      |      |                      |   |
| Calculated MTBF per MIL-HDBK-217F             | All  |       | 4.5  |      | 10 <sup>6</sup> Hrs. | Ground Benign, 70°C Tb                      |
| Calculated MTBF per MIL-HDBK-217F             | All  |       | 0.7  |      | 10 <sup>6</sup> Hrs. | Ground Mobile, 70°C Tb                      |
| Field Demonstrated MTBF                       | All  |       |      |      | 10 <sup>6</sup> Hrs. | See our website for details                 |
| <b>DYNAMIC CHARACTERISTICS</b>                |      |       |      |      |                      |   |
| Input Voltage Ripple Rejection                | Pos  |       | 50   |      | dB                   | 120Hz                                       |
| Output Voltage during Current Transient       |      |       |      |      |                      |   |
| For a Step Change in Output Current (0.1A/us) | Pos  |       | 250  |      | mV                   | 50%-75%-50% Iout max; 100uF                 |
| For a Step Change in Output Current (3A/us)   | Pos  |       | 250  |      | mV                   | 50%-75%-50% Iout max; 470uF                 |
| Settling Time                                 | Pos  |       | 100  |      | µs                   | To within 1.5% Vout nom.                    |
| Turn on Transient                             |      |       |      |      |                      |   |
| Inhibit Time                                  | Pos  | 2     |      | 4    | ms                   | Resistive load                              |
| Rise Time                                     | Pos  | 4     |      | 8    | ms                   | "   |
| Output Voltage Overshoot                      | Pos  |       |      | 0    | V                    | "   |
| <b>EFFICIENCY</b>                             |      |       |      |      |                      |   |
| 100% Load                                     | 1.8V |       | 85   |      | %                    | Main positive outputs                       |
| "   | 3.3V |       | 90   |      | %                    | "   |
| "   | 5.0V |       | 93   |      | %                    | "   |
| "   | -12V |       | 82   |      | %                    | Auxiliary negative output                   |
| 50% Load                                      | 1.8V |       | 86   |      | %                    | Main positive outputs                       |
| "   | 3.3V |       | 91   |      | %                    | "   |
| "   | 5.0V |       | 93   |      | %                    | "   |
| "   | -12V |       | 84   |      | %                    | Auxiliary negative output                   |



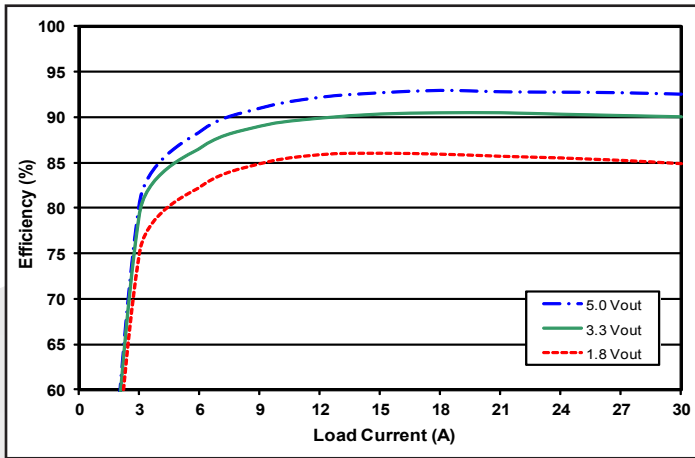


Figure 1: Efficiency at nominal positive output voltage vs. load current for nominal input voltage at 25°C.

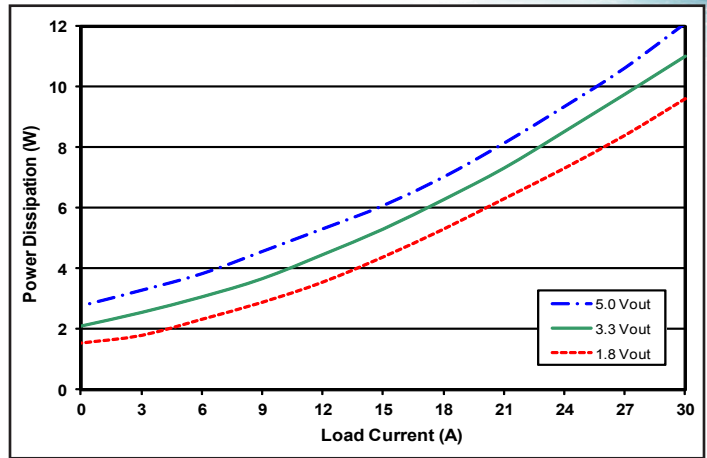


Figure 2: Power dissipation at positive output voltage vs. load current for nominal input voltage at 25°C.

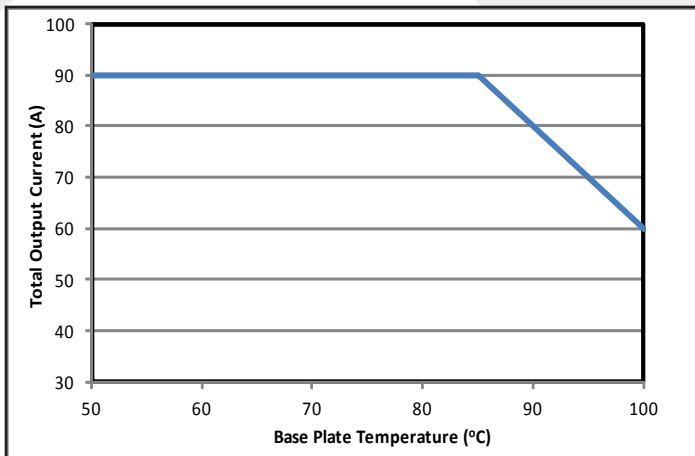


Figure 3: Thermal Derating (maximum total main output current vs. base plate temperature) at nominal input voltage.

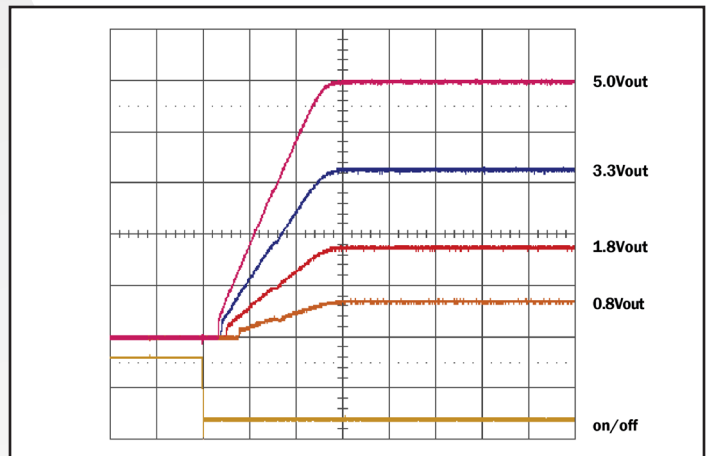


Figure 4: Turn-on transient at full load (resistive load) (2 ms/div). Ch 1: ON/OFF input (5V/div), Ch 2-5: Vout (1V/div)

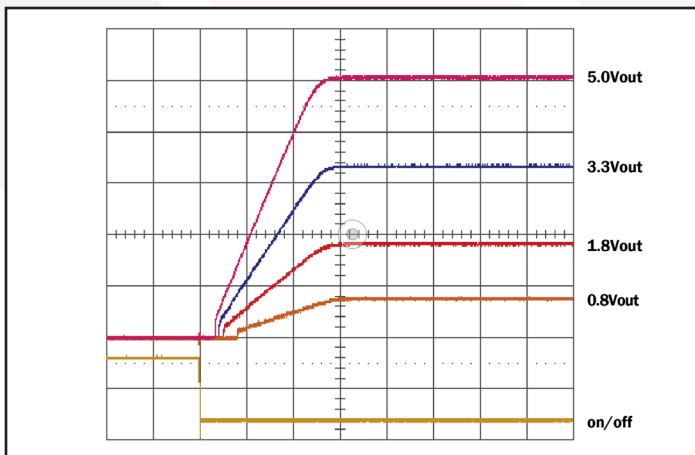


Figure 5: Turn-on transient at zero load (2 ms/div). Ch 1: ON/OFF input (5V/div), Ch 2-5: Vout (1V/div)



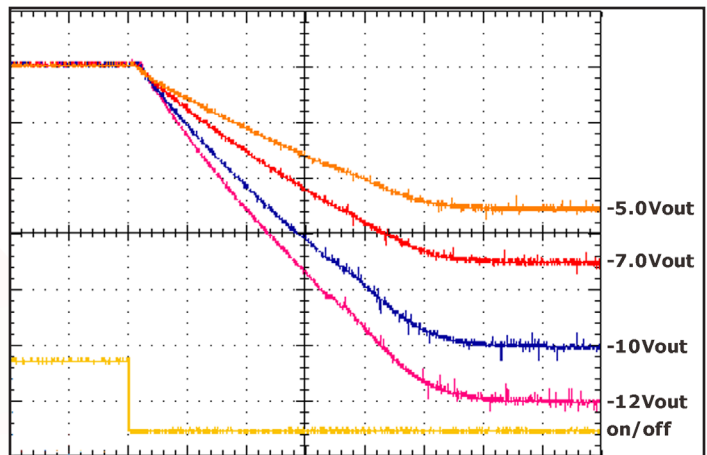



Figure 6: Turn-on transient at full load (resistive load) (10 ms/div). Ch 1: ON/OFF input (2V/div), Ch 2-5: Vout (2V/div)

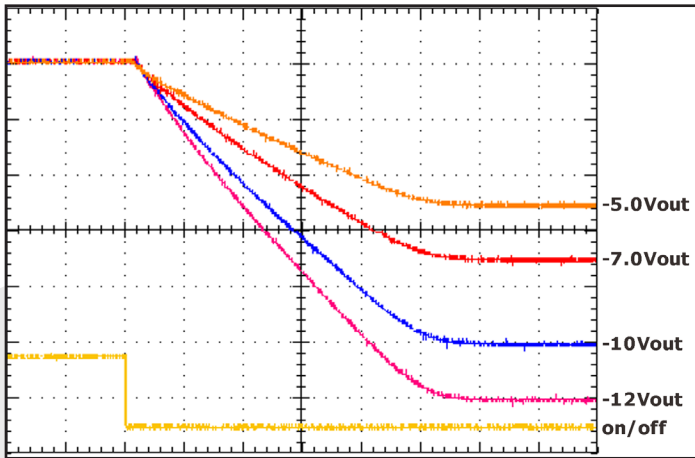


**Figure 7:** Turn-on transient at zero load (resistive load) (10 ms/div).  
Ch 1: ON/OFF input (2V/div), Ch 2-5: Vout (2V/div)

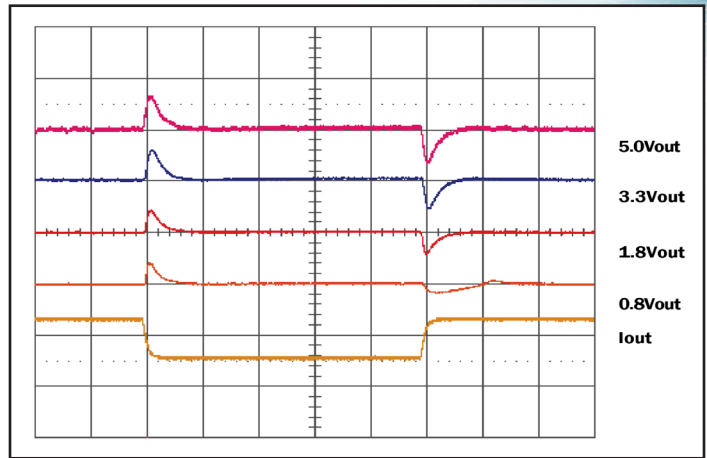


**Figure 8:** Output voltage response for 0.8V, 1.8V, 3.3V, 5.0V units to step-change in load current (50-75-50% of Iout max; di/dt=0.1A/μs). Load cap: 100 μF, 100mΩ ESR tant, 22 μF cer. Ch 1: Iout (10A/div), Ch 2-5: Vout (500mV/div), 200μs/div.

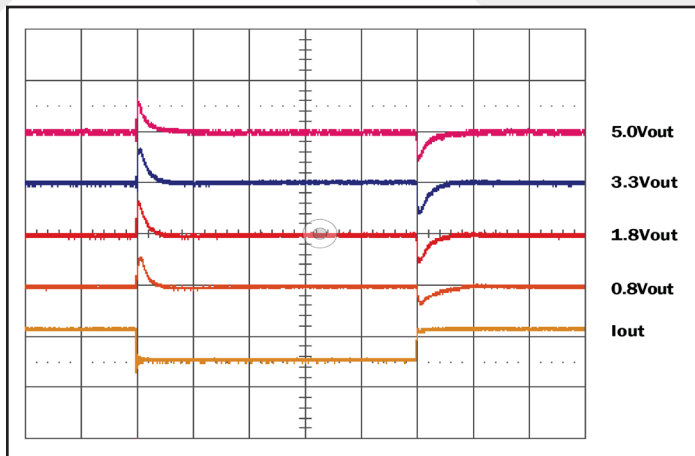


**Figure 9:** Output voltage response for 0.8V, 1.8V, 3.3V, 5.0V units to step-change in load current (50-75-50% of Iout max; di/dt=3A/μs). Load cap: 100 μF, 100mΩ ESR tant, 22 μF cer. Ch 1: Iout (10A/div), Ch 2-5: Vout (500mV/div), 200μs/div.

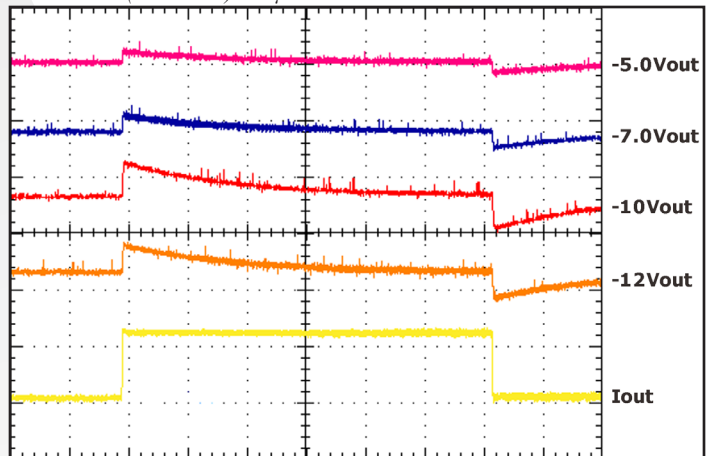


**Figure 10:** Output voltage response for -12V, -10V, -7V, -5V units to step-change in load current (50-75-50% of Iout max; di/dt=1A/μs). Load cap: 100 μF, 100mΩ ESR tant, 22 μF cer. Ch 1: Iout (0.2A/div), Ch 2-5: Vout (1V/div), 2ms/div.

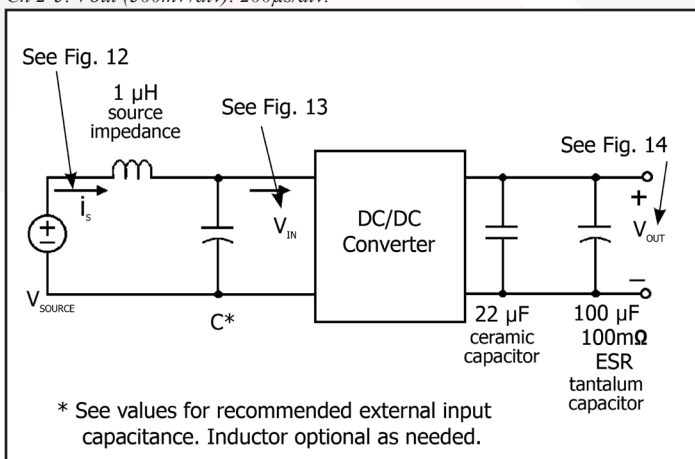


**Figure 11:** Test set-up diagram showing measurement points for Input Reflected Ripple Current (Figure 12), Input Terminal Ripple Voltage (Figure 13), and Output Voltage Ripple (Figure 14).

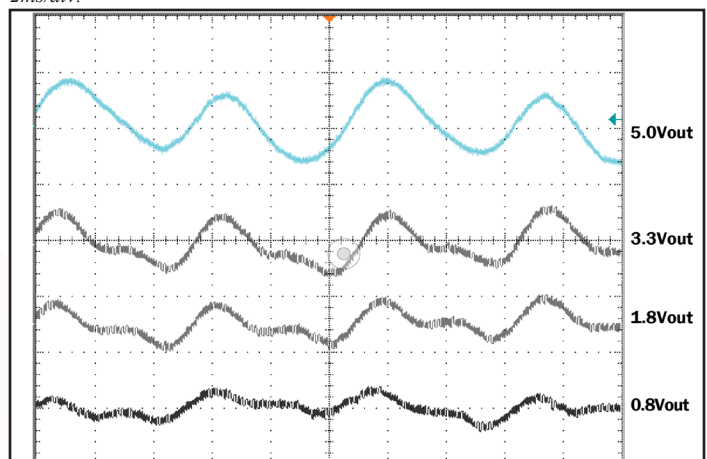

**Figure 12:** Input Reflected Ripple Current,  $i_s$ , through a 1 μH source inductor at nominal input voltage and rated load current (50 mA/div). See Figure 11. 1 μs/div.

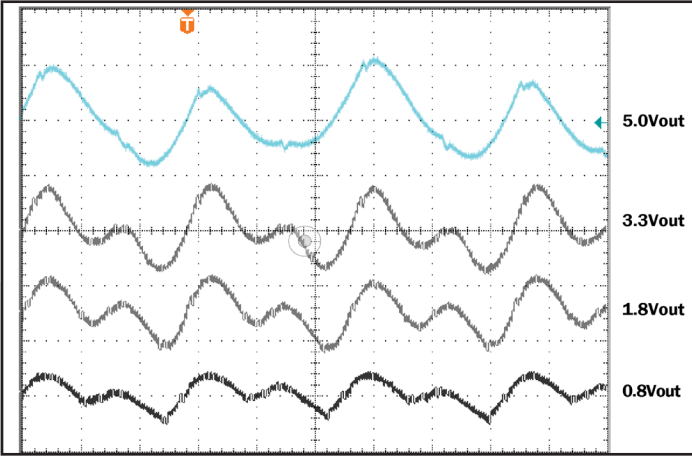

**Figure 13:** Input Terminal Ripple Voltage at nominal input voltage and rated load current (200 mV/div). Load capacitance: 22  $\mu$ F ceramic cap and 100  $\mu$ F tantalum cap. Bandwidth: 20 MHz. See Figure 11. 1  $\mu$ s/div.

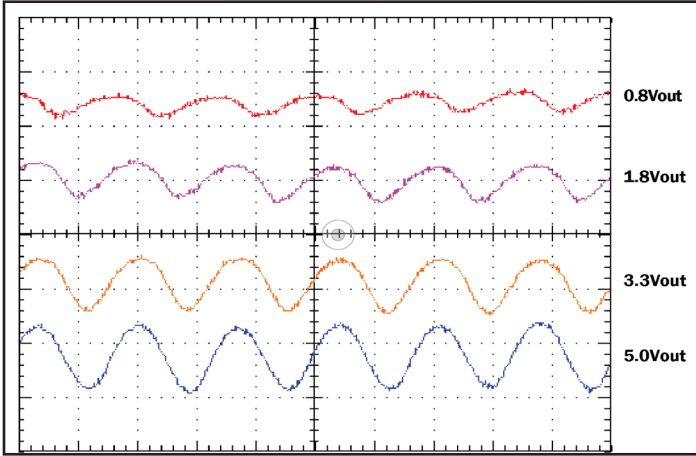

**Figure 14:** Output Voltage Ripple at nominal input voltage and rated load current (50 mV/div). Load capacitance: 22  $\mu$ F ceramic cap and 100  $\mu$ F tantalum cap.. Bandwidth: 20 MHz. See Figure 11. 1  $\mu$ s/div.

### STANDARDS COMPLIANCE

| Parameter                              | Notes & Conditions |
|--|--------------------|
| <b>STANDARDS COMPLIANCE</b>            |                    |
| UL 60950-1:2007/R:2011-12              | Basic Insulation   |
| CAN/CSA C22.2 No. 60950-1:2007/A1:2011 |                    |
| EN 60950-1:2006/A2:2013                |                    |

Note: An external input fuse must always be used to meet these safety requirements. Contact SynQor for official safety certificates on new releases or download from the SynQor website.





## BASIC OPERATION AND FEATURES

The MCOTS-N QUAD Output non-isolated dc-dc converter generates three positive output voltages and one negative output voltage. The output voltage is kept constant over variations in line, load, and temperature. The modules employ synchronous rectification for very high efficiency. The converter runs at a fixed frequency with a predictable EMI performance.

These converters are offered totally encased to withstand harsh environments and thermally demanding applications. Dissipation throughout the converter is so low that it does not require a heatsink for operation in many applications; however, adding a heatsink provides improved thermal derating performance in extreme situations.

## CONTROL FEATURES

**REMOTE ON/OFF:** The ON/OFF input permits the user to control when the converter is on or off. The ON/OFF signal is active low (meaning that a low turns the converter on). Figure A details four possible circuits for driving the ON/OFF pin.

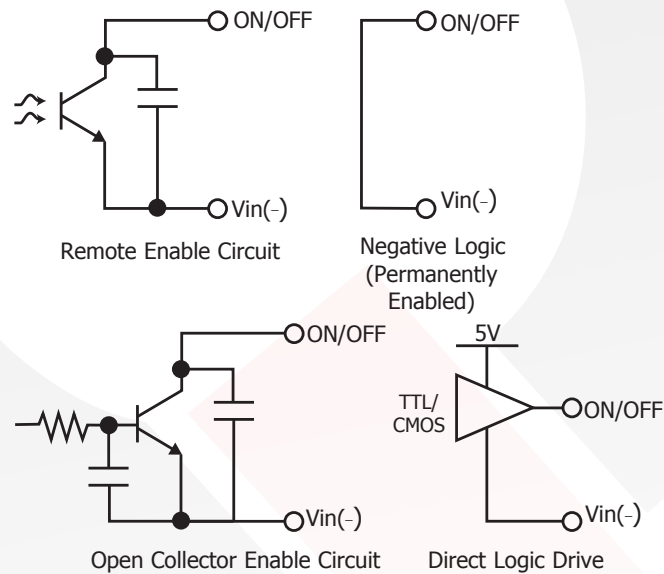


Figure A: Various circuits for driving the ON/OFF pin.

**REMOTE SENSE+:** The SENSE+ inputs are available for main positive outputs and they correct for voltage drops along the conductors that connect the converter's output pins to the load. The SENSE+ pins should be connected to respective VOUT+ at the point on the board where regulation is desired. SENSE+ pins must be connected for proper regulation of the output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than its specified value.

**OUTPUT VOLTAGE TRIM:** The TRIM input permits the user to adjust the output voltage according to the trim range specifications by using an external resistor.

**For positive outputs:** To increase the output voltage from the nominal setpoint of 0.8V using an external resistor, connect the resistor  $R_{trim\_pos}$  between the TRIM and the Ground pin. For a desired increase of the nominal output voltage, the value of the resistor should be:

$$R_{trim\_pos} = \frac{1200}{V_{pos} - 0.8} - 100 \text{ } (\Omega)$$

$$V_{pos} = 0.8 + \frac{1200}{R_{trim\_pos} (\Omega) + 100} \text{ } (V)$$

**For negative output:** To increase the output voltage from the nominal setpoint of -13.475V using an external resistor, connect the resistor  $R_{trim\_neg}$  between the TRIM and the Ground pin. For a desired increase of the nominal output voltage, the value of the resistor should be:

$$R_{trim\_neg} = \frac{-100 V_{neg} - 122.5}{V_{neg} + 13.475} \text{ } (k\Omega)$$

$$V_{neg} = - \frac{13.475 R_{trim\_neg} (k\Omega) + 122.5}{R_{trim\_neg} + 100} \text{ } (V)$$

where  $V_{neg}$  is a negative number

To maintain the accuracy of the output voltage over load current, it is vital that any trim resistor be terminated directly to the converter's Ground pin, not at the connection to the load. We do not recommend bypassing the trim pin directly to ground with a capacitor. The voltage gain from the trim pin to output is rather large, 15:1. Ground bounce through a bypass capacitor could introduce significant noise to the converter's control circuit.

## PROTECTION FEATURES

**Input Under-Voltage Lockout:** For positive outputs the converter is designed to turn off when the input voltage is too low, helping avoid an input system instability problem, described in more detail in the application note titled "Input System Instability". The lockout circuitry is a comparator with DC hysteresis. When the input voltage is rising, it must exceed the typical Turn-On Voltage Threshold value (listed on the specification page) before the converter will turn on. Once the converter is on, the input voltage must fall below the typical Turn-Off Voltage Threshold value before the converter will turn off.

**Output Current Limiting:** To provide protection in an output over load fault condition, the unit is equipped with internal over-current protection. For positive outputs, when the over-current protection is triggered, the unit enters hiccup mode. The units operate normally once the fault condition is removed. For negative output, the output voltage decreases to support load current.

Note: The maximum load current negative output can deliver varies with input and output voltage. The nominal max load current,  $I_{max\_nom}$ , is 1A, when  $V_{in} \geq |V_{neg}|$ . When  $V_{in} < |V_{neg}|$ , the maximum load current is:

$$I_{max} = I_{max\_nom} \times \frac{2V_{in}}{V_{in} + |V_{neg}|}$$

**Internal Over-Voltage Protection:** To fully protect from excessive output voltage, this series contains an Output Over-Voltage Shutdown circuitry. The OVP function is for main positive outputs only. This OVP is independent of the trimmed setpoint. As such, the converter's load is protected from faults in the external trim circuitry (such as a trim pin shorted to ground). Since the setpoint of this OVP does not track trim, it is set at 6.0V. For more detailed information contact SynQor technical support.

**Over-Temperature Shutdown:** Temperature sensors on the converters sense the average temperature of the module. The thermal shutdown circuit is designed to turn the converter off when the temperature at the sensed location reaches the Over-Temperature Shutdown value. It will allow the converter to turn on again when the temperature of the sensed location falls by the amount of the Over-Temperature Shutdown Restart Hysteresis value.

## APPLICATION CONSIDERATIONS

**Input Filtering/Capacitance/Damping:** The filter circuit of Figure B is often added to the converter's input to prevent switching noise from reaching the input voltage bus.

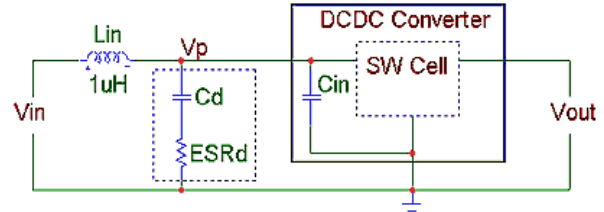


Figure B: Converter with Input Filter.

With  $L_{in}$  of  $1\mu H$ ,  $C_d$  should be  $100\text{-}200\mu F$  and  $R_d$  should be  $0.1\text{-}0.2\Omega$ , in most applications. For more information on designing the input filter and choosing proper values, contact SynQor technical support.

Adding significant external pure ceramic capacitance directly across the converter's input pins is not recommended. Parasitic inductance associated with the input pin geometry and PCB traces can create a high-Q C-L-C circuit with any external capacitors. Just a few nano-Henries of parasitic inductance can create a resonance (or an overtone) near the converter's switching frequency. To avoid this high-frequency resonance, any external input filter should exhibit a net source impedance of at least  $20m\Omega$  resistive through this frequency range. This requirement is easily met with the damping elements discussed above. Adding a small amount (a few  $\mu F$ ) of high-frequency external ceramic will not violate it. If using converters at higher powers, consider the ripple current rating of  $C_d$ . Contact SynQor technical support for details.

**Output Capacitance:** It is recommended to add at least  $100\mu F$  of capacitance, with an ESR in the  $0.1\Omega$  range, to the output of the converters. In many applications, however, additional external output capacitance is required to reduce the response to load transients to an allowable level. For minimal overshoot upon recovery,  $C_d$  should be related to the minimum in-circuit net ESR. For more detailed derivations of these values contact SynQor technical support.

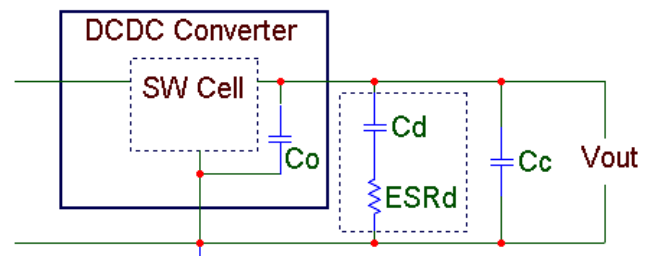


Figure C: Converter with Additional Output Capacitance.



# SynQor®

## Application Section

### MCOTS-N-12-Q3P1N-QT Quad Output Quarter-Brick


**Thermal Consideration:** The maximum operating baseplate temperature,  $T_{B\max}$  is 100 °C. Refer to the Thermal Derating Curves in the Technical Figures section to see the available output current at baseplate temperatures below 100 °C.

$$P_{\text{diss}}^{\text{max}} = \frac{T_{B\max} - T_A}{R_{\text{TH}_{BA}}}$$

A power derating curve can be calculated for any heatsink that is attached to the base-plate of the converter. It is only necessary to determine the thermal resistance,  $R_{\text{TH}_{BA}}$ , of the chosen heatsink between the baseplate and the ambient air for a given airflow rate. This information is usually available from the heatsink vendor. The following formula can be used to determine the maximum power the converter can dissipate for a given thermal condition if its base-plate is to be no higher than 100 °C.

This value of maximum power dissipation can then be used in conjunction with the data shown in the Power Dissipation Curves in the Technical Figures section to determine the maximum load current (and power) that the converter can deliver in the given thermal condition. For convenience, Thermal Derating Curves are provided in the Technical Figures section.



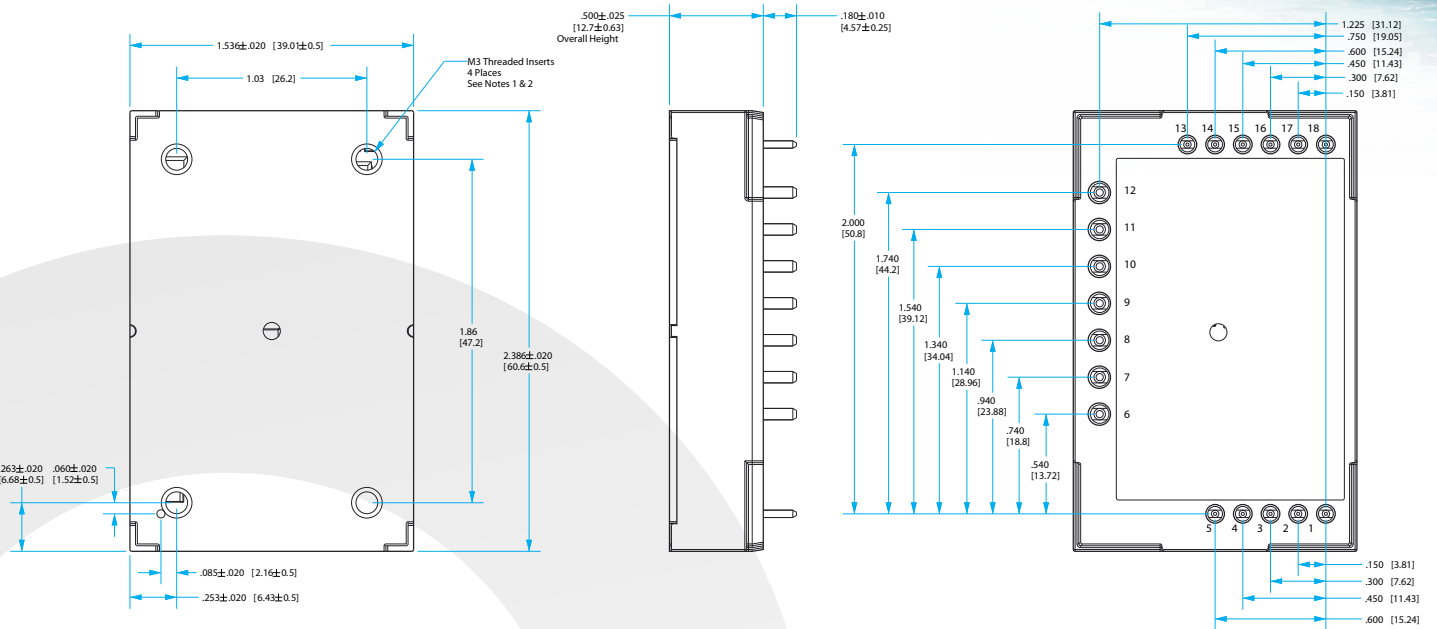

**NOTES:**

- APPLIED TORQUE PER M3 SCREW SHOULD NOT EXCEED 6in-lb (0.7 Nm). SCREW SHOULD NOT EXCEED 0.100" (2.54mm) DEPTH BELOW THE SURFACE OF THE BASEPLATE.
- BASEPLATE FLATNESS TOLERANCE IS 0.004" (.10mm) TIR FOR SURFACE.
- PINS 1-5 AND 13-18 ARE 0.040" (1.02mm) DIA. WITH .080 (2.03mm) DIA. STANDOFF SHOULDERS.
- PINS 6-12 ARE 0.062" (1.57mm) DIA. WITH 0.100" (2.54mm) DIA. STANDOFF SHOULDERS.
- ALL PINS: MATERIAL: COPPERS ALLOY  
FINISH: MATTE TIN OVER NICKEL PLATE
- ALTERNATIVE PIN LENGTH MAYBE AVAILABLE. CHECK WITH FACTORY.
- WEIGHT: 3.27oz. (93g)
- ALL DIMENSIONS IN INCHES(mm)  
TOLERANCES: X.XXin +/- 0.02 (X.Xmm +/- 0.5mm)  
X.XXXin +/- 0.010 (X.XXmm +/- 0.25mm)

**PIN DESIGNATIONS**

| Pin | Label      | Function  |
|-----|------------|---|
| 1   | TRIM_C     | Trim for output C   |
| 2   | SENSE_C    | Positive remote sense for output C  |
| 3   | ON/OFF_C   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output C        |
| 4   | TRIM_NEG   | Trim for negative output  |
| 5   | ON/OFF_NEG | TTL input to turn converter on and off, referenced to ground, with internal pull up for negative output |
| 6   | VOUT_NEG   | Negative output voltage   |
| 7   | VOUT_C     | Positive output voltage C   |
| 8   | GND        | Ground  |
| 9   | Vin(+)     | Positive input voltage  |
| 10  | GND        | Ground  |
| 11  | VOUT_B     | Positive output voltage B   |
| 12  | VOUT_A     | Positive output voltage A   |
| 13  | ON/OFF_A   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output A        |
| 14  | SENSE_A    | Positive remote sense for output A  |
| 15  | TRIM_A     | Trim for output A   |
| 16  | ON/OFF_B   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output B        |
| 17  | SENSE_B    | Positive remote sense for output B  |
| 18  | TRIM_B     | Trim for output B   |




# SynQor<sup>®</sup>

## Encased Mechanical with Flange

### MCOTS-N-12-Q3P1N-QT

### Quad Output Quarter-Brick

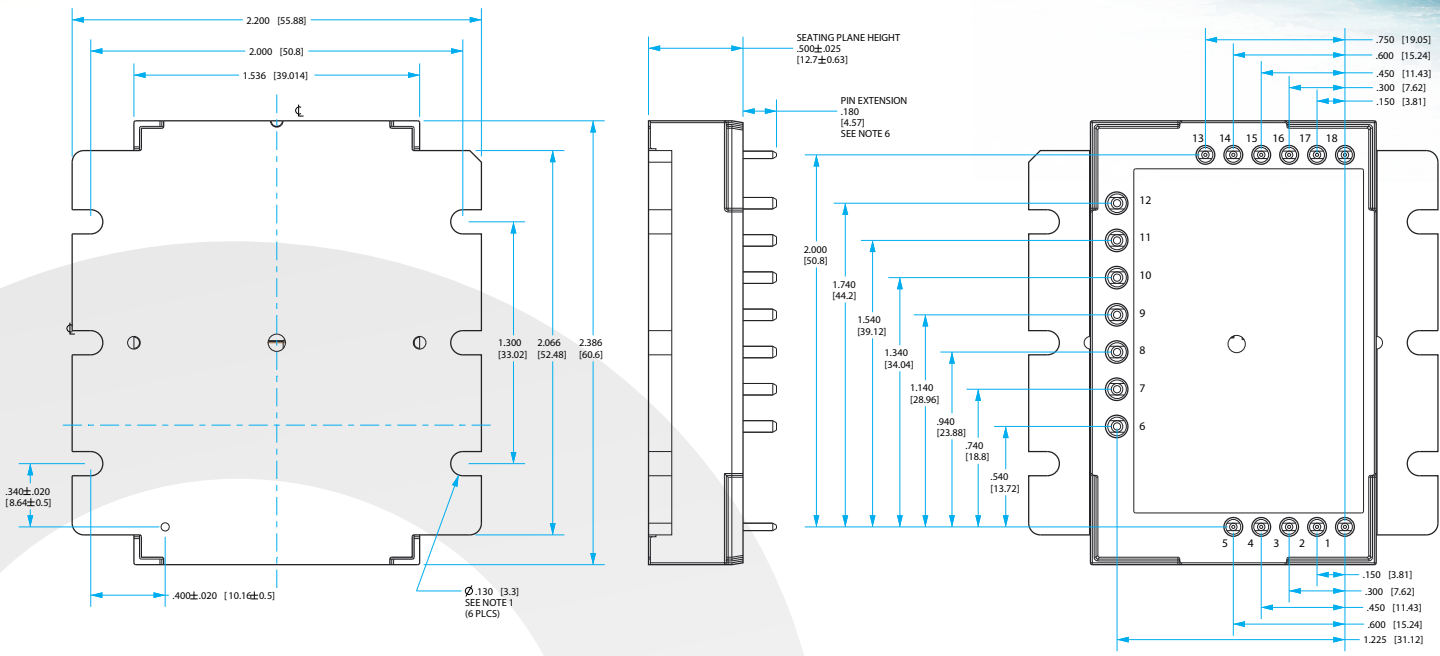

**NOTES:**

- 1 APPLIED TORQUE PER M3 OR 4-40 SCREW SHOULD NOT EXCEED 6in-lb (0.7 Nm).
- 2 BASEPLATE FLATNESS TOLERANCE IS 0.010" (.25mm) TIR FOR SURFACE.
- 3 PINS 1-5 AND 13-18 ARE 0.040" (1.02mm) DIA. WITH .080 (2.03mm) DIA. STANDOFFS.
- 4 PINS 6-12 ARE 0.062" (1.57mm) DIA. WITH 0.100" (2.54mm) DIA. STANDOFFS.
- 5 ALL PINS: MATERIAL: COPPERS ALLOY  
FINISH: MATTE TIN OVER NICKEL PLATE
- 6 ALTERNATIVE PIN LENGTH MAYBE AVAILABLE. CHECK WITH FACTORY.
- 7 WEIGHT: 3.49oz. (99g)
- 8 ALL DIMENSIONS IN INCHES(mm)  
TOLERANCES: X.XXin +/- 0.02 (X.Xmm +/- 0.5mm)  
X.XXXin +/- 0.010 (X.XXmm +/- 0.25mm)

**PIN DESIGNATIONS**

| Pin | Label      | Function  |
|-----|------------|---|
| 1   | TRIM_C     | Trim for output C   |
| 2   | SENSE_C    | Positive remote sense for output C  |
| 3   | ON/OFF_C   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output C        |
| 4   | TRIM_NEG   | Trim for negative output  |
| 5   | ON/OFF_NEG | TTL input to turn converter on and off, referenced to ground, with internal pull up for negative output |
| 6   | VOUT_NEG   | Negative output voltage   |
| 7   | VOUT_C     | Positive output voltage C   |
| 8   | GND        | Ground  |
| 9   | Vin(+)     | Positive input voltage  |
| 10  | GND        | Ground  |
| 11  | VOUT_B     | Positive output voltage B   |
| 12  | VOUT_A     | Positive output voltage A   |
| 13  | ON/OFF_A   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output A        |
| 14  | SENSE_A    | Positive remote sense for output A  |
| 15  | TRIM_A     | Trim for output A   |
| 16  | ON/OFF_B   | TTL input to turn converter on and off, referenced to ground, with internal pull up for output B        |
| 17  | SENSE_B    | Positive remote sense for output B  |
| 18  | TRIM_B     | Trim for output B   |



# SynQor<sup>®</sup>

## Qualification & Screening

### MCOTS-N-12-Q3P1N-QT

#### Quad Output Quarter-Brick

#### Mil-COTS Qualification

| Test Name           | Details  | # Tested<br>(# Failed) | Consistent with MIL-STD-883F Method | Consistent with MIL-STD-883F Method 5005 |
|---------------------|--|------------------------|-------------------------------------|--|
| Life Testing        | Visual, mechanical and electrical testing before, during and after 1000 hour burn-in @ full load | 15<br>(0)              | Method 1005.8                       |  |
| Shock-Vibration     | Visual, mechanical and electrical testing before, during and after shock and vibration tests     | 5<br>(0)               |                                     | MIL-STD-202, Methods 201A & 213B         |
| Humidity            | +85°C, 95% RH, 1000 hours, 2 minutes on / 6 hours off  | 8<br>(0)               | Method 1004.7                       |  |
| Temperature Cycling | 500 cycles of -55°C to +100°C (30 minute dwell at each temperature)                              | 10<br>(0)              | Method 1010.8                       | Condition A                              |
| Solderability       | 15 pins  | 15<br>(0)              | Method 2003                         |  |
| DMT                 | -65°C to +110°C across full line and load specifications in 5°C steps                            | 7<br>(0)               |                                     |  |
| Altitude            | 70,000 feet (21 km), see Note  | 2<br>(0)               |                                     |  |

Note: A conductive cooling design is generally needed for high altitude applications because of naturally poor convective cooling at rare atmospheres.

#### Mil-COTS DC-DC Converter and Filter Screening

| Screening                       | Process Description                               | S-Grade         | M-Grade              |
|---------------------------------|---|-----------------|----------------------|
| Baseplate Operating Temperature |   | -55°C to +100°C | -55°C to +100°C      |
| Storage Temperature             |   | -65°C to +135°C | -65°C to +135°C      |
| Pre-Cap Inspection              | IPC-A-610, Class III                              | •               | •                    |
| Temperature Cycling             | MIL-STD-883F, Method 1010, Condition B, 10 Cycles |                 | •                    |
| Final Electrical Test           | 100%  | 25°C            | -55°C, +25°C, +100°C |
| Final Visual Inspection         | MIL-STD-883F, Method 2009                         | •               | •                    |

#### Mil-COTS MIL-STD-810G Qualification Testing

| MIL-STD-810G Test    | Method                  | Description  |
|----------------------|-------------------------|--|
| Fungus               | 508.6                   | Table 508.6-I  |
| Altitude             | 500.5 - Procedure I     | Storage: 70,000 ft / 2 hr duration   |
|                      | 500.5 - Procedure II    | Operating: 70,000 ft / 2 hr duration; Ambient Temperature                              |
| Rapid Decompression  | 500.5 - Procedure III   | Storage: 8,000 ft to 40,000 ft   |
| Acceleration         | 513.6 - Procedure II    | Operating: 15 g  |
| Salt Fog             | 509.5                   | Storage  |
| High Temperature     | 501.5 - Procedure I     | Storage: 135°C / 3 hrs   |
|                      | 501.5 - Procedure II    | Operating: 100°C / 3 hrs   |
| Low Temperature      | 502.5 - Procedure I     | Storage: -65°C / 4 hrs   |
|                      | 502.5 - Procedure II    | Operating: -55°C / 3 hrs   |
| Temperature Shock    | 503.5 - Procedure I - C | Storage: -65°C to 135°C; 12 cycles   |
| Rain                 | 506.5 - Procedure I     | Wind Blown Rain  |
| Immersion            | 512.5 - Procedure I     | Non-Operating  |
| Humidity             | 507.5 - Procedure II    | Aggravated cycle @ 95% RH (Figure 507.5-7 aggravated temp - humidity cycle, 15 cycles) |
| Random Vibration     | 514.6 - Procedure I     | 10 - 2000 Hz, PSD level of 1.5 g <sup>2</sup> /Hz (54.6 grms), duration = 1 hr/axis    |
| Shock                | 516.6 - Procedure I     | 20 g peak, 11 ms, Functional Shock (Operating no load) (saw tooth)                     |
|                      | 516.6 - Procedure VI    | Bench Handling Shock   |
| Sinusoidal vibration | 514.6 - Category 14     | Rotary wing aircraft - helicopter, 4 hrs/axis, 20 g (sine sweep from 10 - 500 Hz)      |
| Sand and Dust        | 510.5 - Procedure I     | Blowing Dust   |
|                      | 510.5 - Procedure II    | Blowing Sand   |





**MCOTS-N-12-Q3P1N-QT**  
**Quad Output**  
**Quarter-Brick**

**Ordering Information**

**Ordering Information/ Part Numbering**

Not all combinations make valid part numbers, please contact SynQor for availability. See product summary page for details.

**Example: MCOTS-N-12-Q3P1N-QT**

| Family       | Product                          | Input Voltage    | Output Voltage                                      | Package                       | Thermal Design                                 | Screening Level                        | Options               |
|--------------|----------------------------------|------------------|---|-------------------------------|--|--|-----------------------|
| <b>MCOTS</b> | <b>N:</b> Non-Isolated Converter | <b>12:</b> 6-15V | Quad Output<br><b>Q3P1N:</b> 3 Positive, 1 Negative | <b>QT:</b> Quarter Brick Tera | <b>N:</b> Normal Threaded<br><b>F:</b> Flanged | <b>S:</b> S-Grade<br><b>M:</b> M-Grade | [ ]: Standard Feature |

**APPLICATION NOTES**

A variety of application notes and technical white papers can be downloaded in PDF format from our [website](#).

**PATENTS**

SynQor holds numerous U.S. patents, one or more of which apply to most of its power converter products. Any that apply to the product(s) listed in this document are identified by markings on the product(s) or on internal components of the product(s) in accordance with U.S. patent laws.

SynQor's patents include the following:

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 5,999,417 | 6,222,742 | 6,545,890 | 6,594,159 | 6,731,520 | 6,894,468 |
| 6,896,526 | 6,927,987 | 7,050,309 | 7,072,190 | 7,085,146 | 7,119,524 |
| 7,269,034 | 7,272,021 | 7,272,023 | 7,558,083 | 7,564,702 | 7,765,687 |
| 7,787,261 | 8,023,290 | 8,149,597 | 8,493,751 | 8,644,027 | 9,143,042 |

**WARRANTY**

SynQor offers a two (2) year limited warranty. Complete warranty information is listed on our website or is available upon request from SynQor.