HELIΘS
POWER SOLUTIONS

- Ideal for 10/100 Base-T Cat 5e protection
- All four twisted pairs protected
- Primary and secondary protection
- Weatherproof enclosure
- High-speed, high-energy handling capability
- Designed to minimize insertion loss and cross-talk
- Enclosure meets UL * 497B rain test requirements
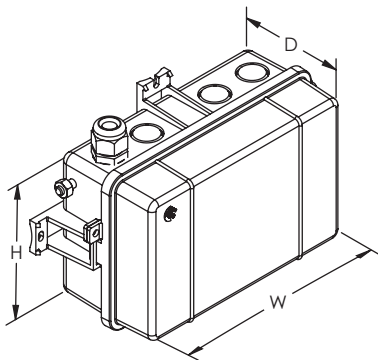
Part Number	MWECSPOE
Max Continuous Operating Voltage (Uc)	60 VDC
Rated Load Current (IL)	1 A
Nominal Discharge Current (In)	20 kA 8/20 µs
Max Discharge Current (Imax)	25 kA 8/20 µs
Voltage Protection Level (Up)	50 V @ 3 kA
Strain Relief Cable Diameter	Gray, 4.6 - 11.2 mm
Protection Modes	Common Differential
Temperature	-40 to 80 ℃
Enclosure Material	UL * 94V-0 Thermoplastic
Knockout Sizes	(4) 22,5 mm (2) 28,4 mm
Depth (D)	89.4 mm
Height (H)	137.2 mm
Width (W)	221.4 mm
Unit Weight	0.6 kg
Complies With	ANSI * /IEEE * C62.41.2-2002 Cat A, Cat B, Cat C
Certifications	UL

Part Number	MWECSPOE
Standard Packaging Quantity	1 pc
UPC	78285663164
EAN-13	8711893060638