



The AMP-K5750 is a DC UPS that provides

- + Power to emergency LED lights in the lift.
- + Keeps a 7AH battery charged.
- + In case of AC mains failure the 7AH battery will be able to provide power to the emergency lights and emergency bell/buzzer.
- + Easy to install.
- + Can be customized to up to 100W of power.
- + Cable access via plastic grommets.
- + Can be private labelled.
- + LED status indicators

Possible markets:

- + Emergency lighting
- + Security (home and office)
- + Card access



AMP-K5750

DC UPS

Electrical Specifications for Wittur.

Input Voltage:.....85-264Vac 50Hz

Output:

- V Load:.....14Vdc
- V Battery:..... 13.8

Max Load Power: 25W (12V Output)

Battery Current: 700mA

Back up time: 2.5 hours

Recharge time: 12 hours

Battery Capacity: 7AH




Solid Green:.....Battery fully charged

Flashing Green:.....Battery charging

Flashing Red:.....Battery discharging

Solid Red:.....Battery Low

Wiring Instructions

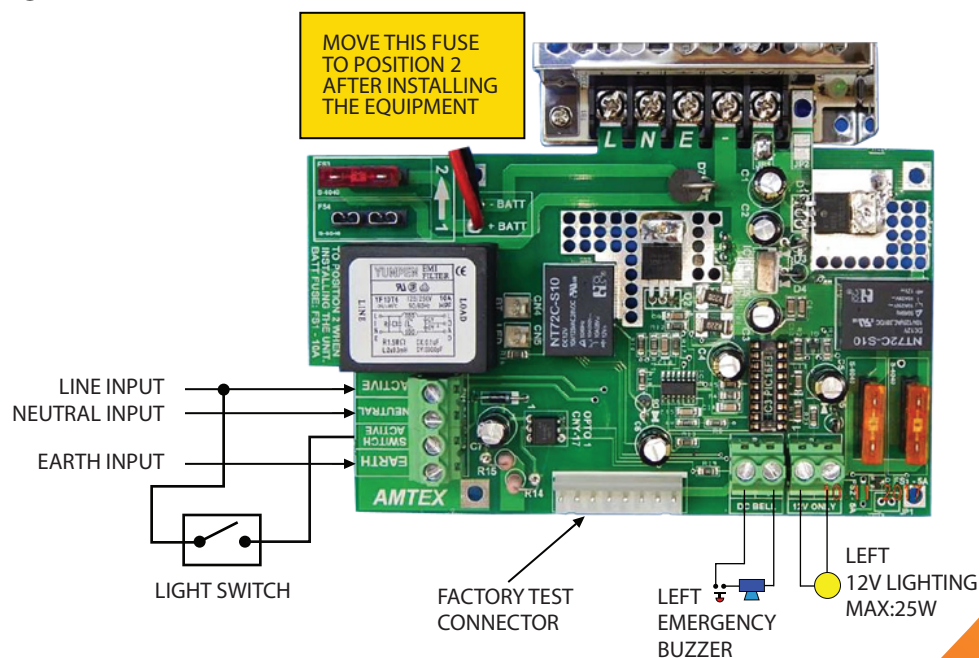

NEW ZEALAND



Phone: +64 9 835 0700
 Email: sales@heliosps.co.nz
 Address: 1 Heremai St,
 Henderson, Auckland 0612
www.heliosps.co.nz

AUSTRALIA

Phone: +61 2 7200 9200
 Email: sales@heliosps.com.au
 Address: Unit 6, 2-8 South St,
 Rydalmere, NSW 2116
www.heliosps.com.au

ASIA

Phone: +65 6871 4140
 Email: sales@heliosps.asia
 Address: 168 Robinson Road,
 #12-01 Capital Tower, Singapore 048545
www.heliosps.asia

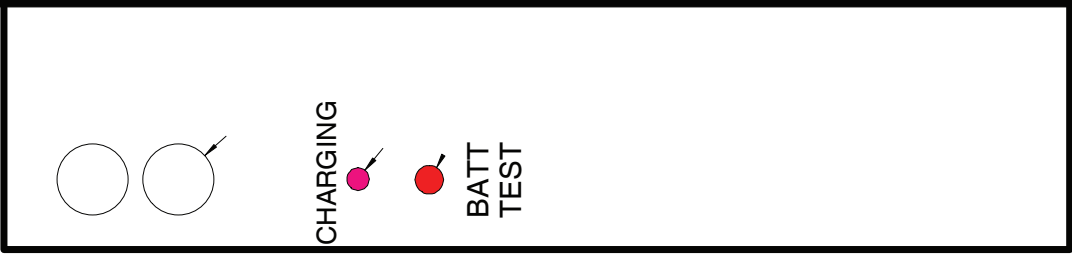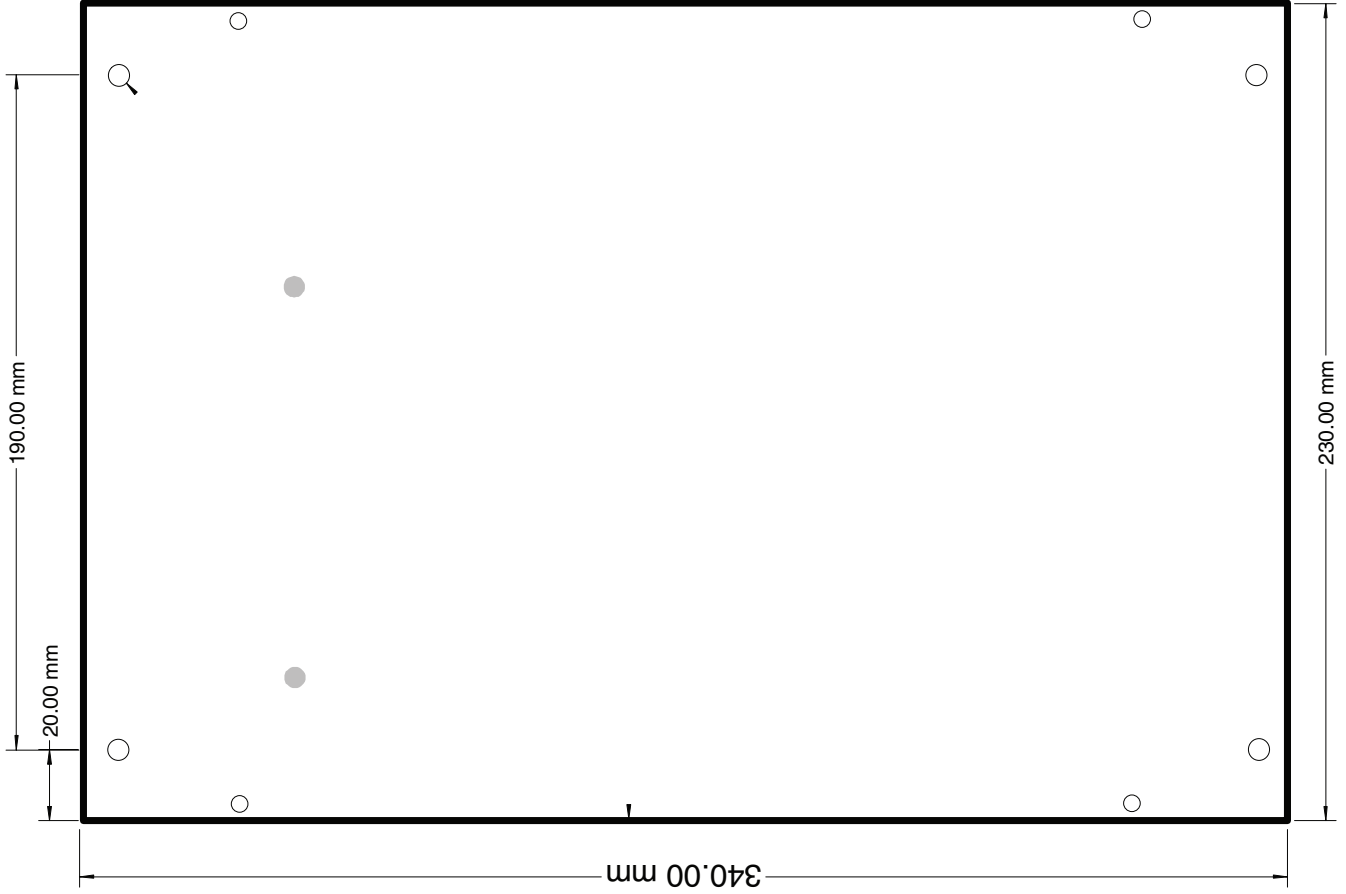

TITLE		K5750-M1-R1		HELIOS POWER SOLUTIONS	
SIZE	CAGE CODE	DWG NO	REV		
A2					
SCALE			SHEET		