


# IS SERIES

**DC/DC Single Output: 3 Watts**

**HELIOS**  
POWER SOLUTIONS

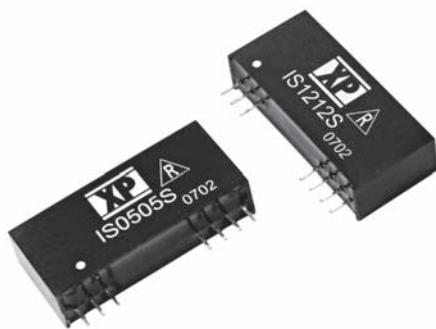

## Features

- Regulated Single Output
- SIP Package
- 1000 VDC Isolation
- Optional 3000 VDC Isolation
- Continuous Short Circuit Protection
- MTBF >1.1 MHrs
- 3 Year Warranty

## Specification

### Input

- |                                |  |
|--------------------------------|--|
| Input Voltage Range            | • Nominal ±10%                                       |
| Input Reflected Ripple Current | • 20 mA pk-pk through 12 µH inductor, 5 Hz to 20 MHz |
| Input Filter                   | • Capacitor  |

### Output

- |                          |   |
|--------------------------|---|
| Output Voltage           | • See table   |
| Minimum Load             | • None <sup>(2)</sup>                                     |
| Line Regulation          | • ±0.5% max   |
| Load Regulation          | • ±0.5% max (0% to full load)<br>±1.5% for 3.3 V versions |
| Setpoint Accuracy        | • ±2% max   |
| Ripple & Noise           | • 75 mV pk-pk max, 20 MHz bandwidth                       |
| Temperature Coefficient  | • ±0.02%/°C   |
| Short Circuit Protection | • Continuous with auto recovery (foldback)                |
| Maximum Capacitive Load  | • 470 µF  |

### General

- |                       |  |
|-----------------------|--|
| Efficiency            | • See table                                  |
| Isolation Voltage     | • 1000 VDC, optional 3000 VDC <sup>(1)</sup> |
| Isolation Resistance  | • 10 $\Omega$                                |
| Isolation Capacitance | • 60 pF                                      |
| Switching Frequency   | • 50 kHz typical                             |
| MTBF                  | • >1.1 MHrs to MIL-HDBK- 217F at 25 °C, GB   |

### Environmental



- |                       |   |
|-----------------------|---|
| Operating Temperature | • -25 °C to +70 °C                                      |
| Storage Temperature   | • -40 °C to +125 °C                                     |
| Case Temperature      | • +100 °C max   |
| Cooling               | • Convection-cooled                                     |
| Derating              | • Derate from 100% load at +70 °C to 50% load at +85 °C |

### Notes

- Add suffix 'H' to model number for 3000 VDC isolation.
- Operation at no load will not damage device but it may not meet all specifications
- All dimensions in inches (mm).
- Pin pitch tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Weight: 0.02 lbs (7.2 g)

Input Voltage	No Load Input Current	Output Voltage	Output Current	Efficiency	Model Number <sup>(1)</sup>
5 V	100 mA	3.3 V	600 mA	53%	IS0503SA
	100 mA	5.0 V	600 mA	62%	IS0505SA
	100 mA	9.0 V	333 mA	67%	IS0509SA
	100 mA	12.0 V	250 mA	70%	IS0512SA
	100 mA	15.0 V	200 mA	68%	IS0515SA
	120 mA	24.0 V	125 mA	64%	IS0524SA
12 V	60 mA	3.3 V	600 mA	55%	IS1203SA
	60 mA	5.0 V	600 mA	60%	IS1205SA
	60 mA	9.0 V	333 mA	67%	IS1209SA
	60 mA	12.0 V	250 mA	69%	IS1212SA-1
	60 mA	15.0 V	200 mA	70%	IS1215SA
	60 mA	24.0 V	125 mA	68%	IS1224SA
24 V	30 mA	3.3 V	600 mA	54%	IS2403SA
	30 mA	5.0 V	600 mA	61%	IS2405SA
	30 mA	9.0 V	333 mA	65%	IS2409SA
	30 mA	12.0 V	250 mA	70%	IS2412SA
	30 mA	15.0 V	200 mA	71%	IS2415SA
	30 mA	24.0 V	125 mA	71%	IS2424SA

## Mechanical Details

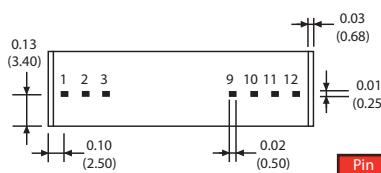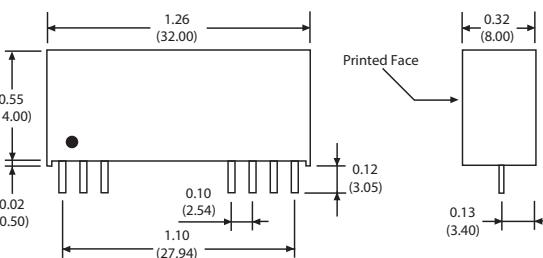

Pin	Standard	'H' Versions
1	+Vin	+Vin
2	N.C.	-Vin
3	N.C.	N.C.
9	N.C.	N.C.
10	-Vout	-Vout
11	+Vout	+Vout
12	-Vin	N.C.