

CSI50 SERIES

DC/AC Inverter 24VAC: 50 Watts



Features

- ◆ Filtered 24VAC 50Hz output
- ◆ DC Input voltage options: 12V, 24V & 48V
- ◆ Convection cooled: No fans
- ◆ Suitable for CCTV applications requiring clean 24VAC
- ◆ Fully isolated input – output 1000VDC
- ◆ Over voltage protection
- ◆ Overload and short circuit protection
- ◆ MTBF > 150,000hrs
- ◆ Special input / output combinations on request.
- ◆ Other power levels on request.

General Specifications

Input Voltage	12VDC (11 ~ 16) 24VDC (21 ~ 30) 48VDC (38 ~ 60) ◆ Other voltages on request
Input Protection	Reverse polarity protection. Inrush current limiting Input Fuse
Isolation	Input – Output: 1000vdc Input – Chassis: 700vdc Output – Chassis: 500vdc
Efficiency	Model dependent , typically 80-90%
Output voltage	24VAC 50Hz
Wave Form	Sinusoidal
Output Power	50 watts
Harmonic Distortion	<50% at full load
Voltage Adjust.	N / A
EMI	EN5022 Class A Conducted & Radiated
Regulation	±5% Line / Load combined
Ripple & Noise	Typically 500mV (20MHZ BW)
Overload Protection	Current limiting, with hiccup type short-circuit protection
Overvoltage Protection	Double regulator loop & Transorb across output
Operating Temp.	°0C to +50°C, +70°C at 30 watts
Cooling	Conduction cooling / Convection cooling
Environmental Protection	Ruggedizing and Conformal coating of PCB.
Shock & Vibration	IEC61373 Cat 1 A & B and Cat 2
Humidity	5-95% non-condensing, higher ration option
MTBF	>150,000 hrs
Indicators	N/A
Connector	9-pole barrier terminal block
Alarm	N/A optional
Dimensions	198 x 113 x 51mm (F1 package)
Weight	0.8kg


Description

The **CSI50** series DC/AC Power Inverter , is designed to provide a regulated and filtered 24VAC for applications such as powering CCTV cameras.

The most common model is a 24VDC / 24VAC , but other combinations are available with higher power levels.

Model	Input VDC	Output V	Output A	Power W
CSI50-1224EFT	12V	24VAC	2.1A	50W
CSI50-2424EFT	24V	24VAC	2.1A	50W
CSI50-4824EFT	48V	24VAC	2.1A	50W

◆ Final part numbers will be factory allocated to reflect customer input & output requirements.

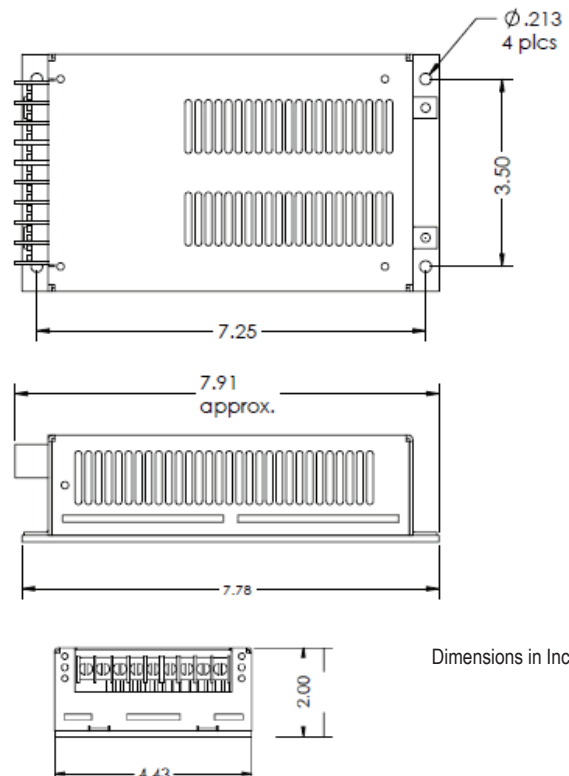

Dimensions in Inches