

### 3-Phase Military AC-DC Programmable Power Supply

3-Phase, 80-265 Vrms <sub>L-L</sub> <b>Input Power</b>	47-800 Hz <b>Input Frequency</b>	0-80 V Regulated Programmable <b>Output Voltages</b>	4000 W Continuous <b>Output Power</b>
--	-------------------------------------	--	--

*Sealed Construction, Ultra low Weight, Compact Size*



DESIGNED & MANUFACTURED IN USA

SynQor's Military AC-DC Power Supply units are designed for the extreme environmental and demanding electrical conditions of Military/Aerospace applications. SynQor's MPPS incorporates field proven high efficiency designs and rugged packaging technologies. This MPPS will accept a 3-Phase input with a wide range of input voltage and frequency values while delivering a well-conditioned continuous 4000 W, DC regulated output to the load. The output voltage and output current limit can be adjusted on the fly via RS-232 or web interface. Current sharing allows multiple units to be used in parallel. The MPPS-4000 Power Supply is designed and manufactured in SynQor's USA headquarters and manufacturing facilities to comply with a wide range of military standards.

#### Combine Up to Eight Units for Higher Power

##### MPPS Product Features

- Sealed, weather-proof, shock-proof construction
- 4000W output power
- Adjustable output voltage and output current limit
- Full power operation: -40 °C to +55 °C
- 3-Phase AC Input: 80-265 Vrms<sub>L-L</sub>; 47-800 Hz
- Power factor correction at AC input
- Up to 8 units can be combined for higher power
- User I/O and Configuration signal port
- Synchronized start and stop of multiple units
- Current sharing for paralleled units
- Battle Mode for over-temperature events
- SNMP Network Port
- 1U high rack mount unit (1.73"H x 17.00"W x 20.42"D)
- Low weight: 28 lbs.

##### In-Line Manufacturing Process

- AS9100 and ISO 9001 certified facility
- Full component traceability

##### Specification Compliance

- MPS units are designed to meet:
- MIL-STD-1399-300B - Interface Shipboard
- MIL-STD-810G - Environmental Engineering
- MIL-STD-461F - Electromagnetic Interference
- MIL-STD-704F - Aircraft Electrical Power
- MIL-STD-1275D - Vehicle Electrical Power

##### Contents

Technical Specification .....	2
Technical Figures .....	3
Technical Characteristics .....	4
Block Diagram .....	5
Technical Specification .....	6
Mechanical Diagrams .....	8
Accessory Options .....	9
Ordering Information .....	10

Specifications subject to change without notice.

### PROGRAMMABLE FEATURES

Model Part Number	Programmable Voltage Range	Programmable Current Range	Voltage Set Point Accuracy	Maximum Output Current (Short Circuit)
<b>28V Default</b> (MPPS-4000-3W28)	<b>0 - 35 V</b>	<b>0 - 150 A</b>	<b>±5 mV typical</b> <b>±25 mV max.</b>	<b>180 A</b>
<b>48V Default</b> (MPPS-4000-3W48)	<b>0 - 55 V</b>	<b>0 - 120 A</b>	<b>±8 mV typical</b> <b>±38 mV max.</b>	<b>145 A</b>
<b>72V Default</b> (MPPS-4000-3W72)	<b>0 - 80 V</b>	<b>0 - 78 A</b>	<b>±10 mV typical</b> <b>±50 mV max.</b>	<b>95 A</b>

### INPUT CHARACTERISTICS

#### Operating AC Input

Voltage	3-Phase, 80-265 Vrms <sub>L-L</sub> *
Frequency	47-800 Hz
Input Power Factor	>0.98 at 47-65Hz >0.97 at 400Hz >0.92 at 800Hz

Maximum Input Current Continuous 27 A

AC Input Circuit Breaker Rating 30 A

(Continuous full load, 110 Vrms<sub>L-L</sub>)

\*Power Derating below 110 Vrms<sub>L-L</sub> (see Figure 2)

### OUTPUT CHARACTERISTICS

Total Output Power Continuous 4000 W

#### Output Ripple Voltage (20MHz BW)

28 V Default (MPPS-4000-3W28)	25 mV max.
48 V Default (MPPS-4000-3W48)	38 mV max.
72 V Default (MPPS-4000-3W72)	50 mV max.

#### Current Limit Inception

All Models 110%-120% Current Set point

#### Hold-up Time

To -20% rated Vout, 4000 W 10 ms

#### Turn-on Delay

All Output Voltages 2 s max.

#### Output Voltage Response to Load Transient

Iout steps from 50-75% at 0.2 A/μs

28 V Default (MPPS-4000-3W28) 1 V max

48 V Default (MPPS-4000-3W48) 1.5 V max

72 V Default (MPPS-4000-3W72) 2 V max.

#### Short Circuit Protection

Constant current source 110-120% Current Set point  
See Figure 4



# Technical Figures

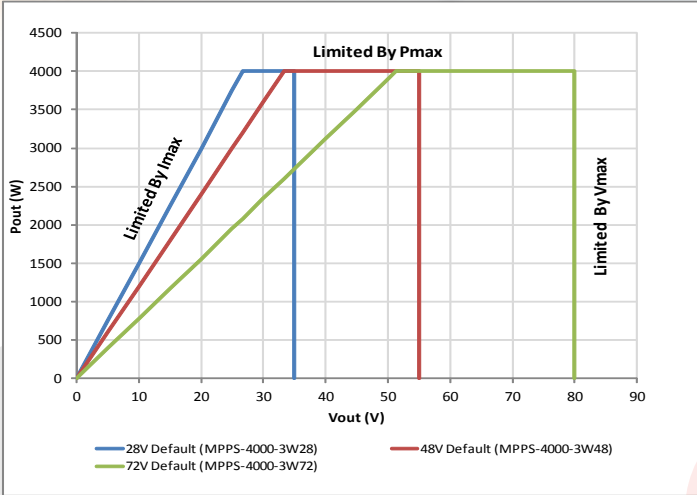


Figure 1: Available Output Power vs Output Voltage

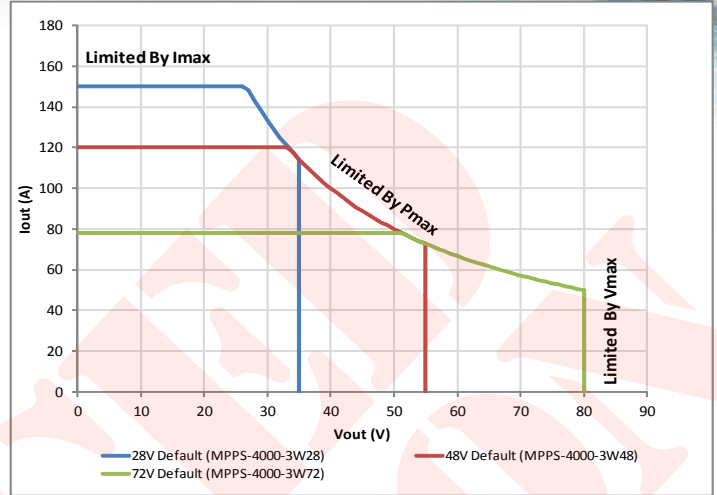


Figure 2: Available Output Current vs Output Voltage

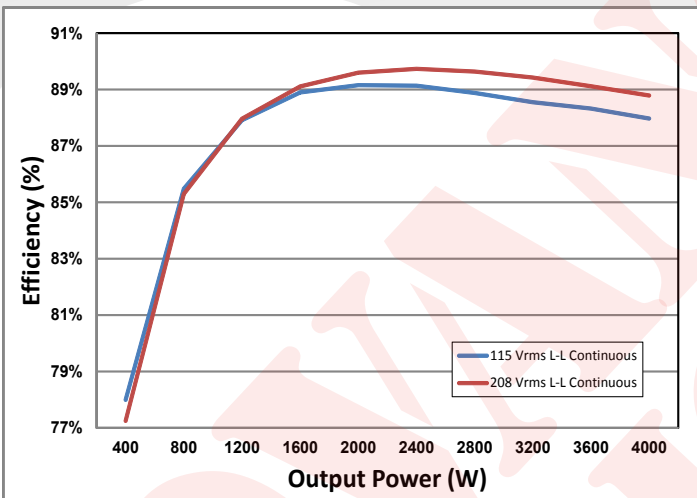


Figure 3: Typical Efficiency vs Output Power.  $V_{out} = 72\text{ V}$

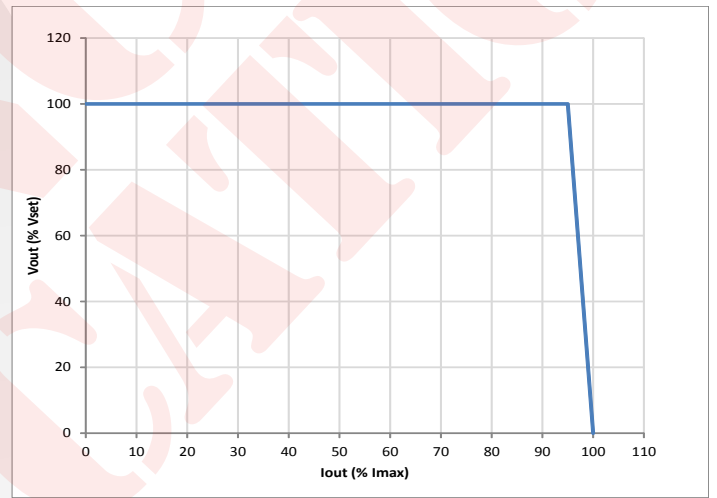


Figure 4: Voltage Fold back During Current Limit, Short Circuit

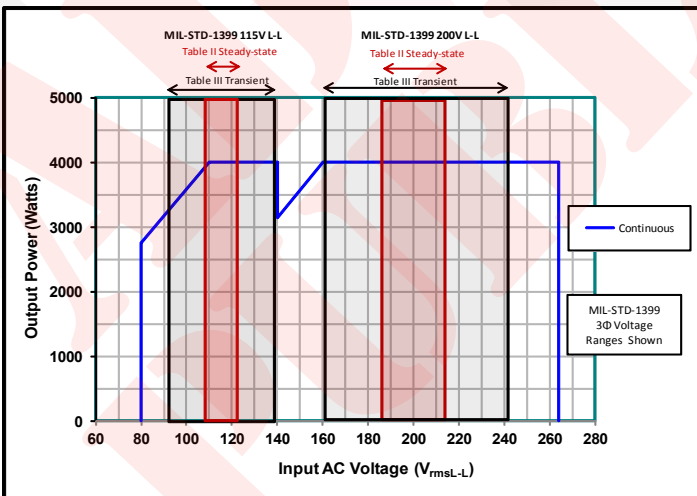


Figure 5: Rated Output Power vs Input AC Voltage

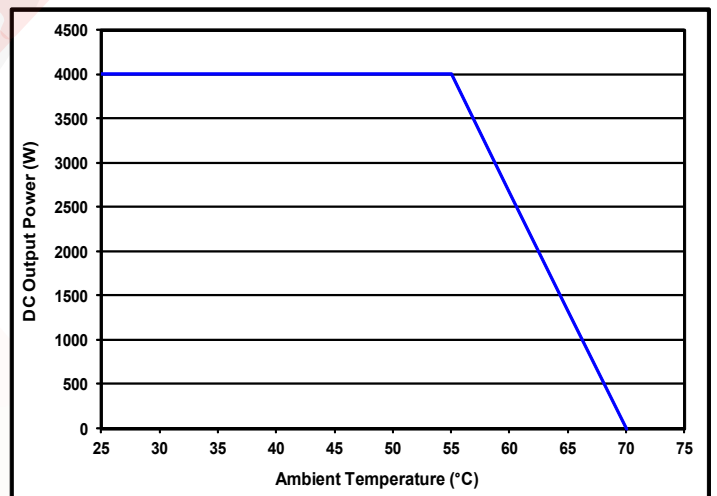


Figure 6: Thermal Derating Curve (output power vs. ambient temperature) at 115 VL-L

#### ENVIRONMENTAL CHARACTERISTICS MIL-STD-810G

##### Temperature Methods 501.5, 502.5

Operating Temperature	
Full Rated Power	-40 °C — +55 °C
Reduced Power per Figure 6	-40 °C — +70 °C
Storage Temperature	-40 °C — +70 °C

##### Altitude Method 500.5

Operating	0 - 18,000 ft
Non-operating	0 - 40,000 ft

##### Environmental Tests

Shock/Drop	Method 516.6, Procedures 1,4,6
Temperature Shock	Method 503.5, Procedure 1
Vibration	Method 514.6, CAT 5, 7, 8, 9, 24
Fungus	Method 508.6
Salt Fog	Method 509.5
Sand and Dust	Method 510.5, Procedures 1,2
Rain	Method 506.5 Procedure 1
Humidity	Method 507.5 Procedure 2
Mechanical Vibrations of Shipboard Equipment	Method 528 Procedure 1

#### RELIABILITY CHARACTERISTICS MIL-HDBK-217F

MTBF	100kHrs	MIL-217F Ground Benign, Ta=25 °C
------	---------	----------------------------------

#### ELECTROMAGNETIC CAPABILITY MIL-STD-461F

CE101	30 Hz - 10 kHz
CE102	10 kHz - 10 MHz
CS101	30 Hz - 150 kHz
CS106	10 kHz - 40 GHz
CS114	10 kHz - 200 MHz
CS116	10 kHz - 100 MHz
RE101	30 Hz - 100 kHz
RE102	10 kHz - 18 GHz
RS101	30 Hz - 100 kHz
RS103	2 MHz - 40 GHz

#### MECHANICAL CHARACTERISTICS

##### Standard 1U Chassis

Chassis Size	1.73"(1U)H x 17.00"W x 20.42"D
Case Material	Aluminum
Total Weight	28 lbs

##### Connectors

AC Input Connector	MS3470L14-8PW
DC Output Connector (+)	CGE2E18H5FB-16
DC Output Connector (-)	CGE2E18H5FWB-16
User I/O Ports	HD DB15 Female
Configuration I/O Port	HD DB15 Male
Ethernet Port	Amphenol RJF22N00, Code B


##### Cooling Exhaust Fans

Sound Pressure Level (SPL)	54 dB(A)
Air Flow	0.67(m3/min) 23.7 CFM

Two fans in system, above specs are for each fan separately.



Block Diagram

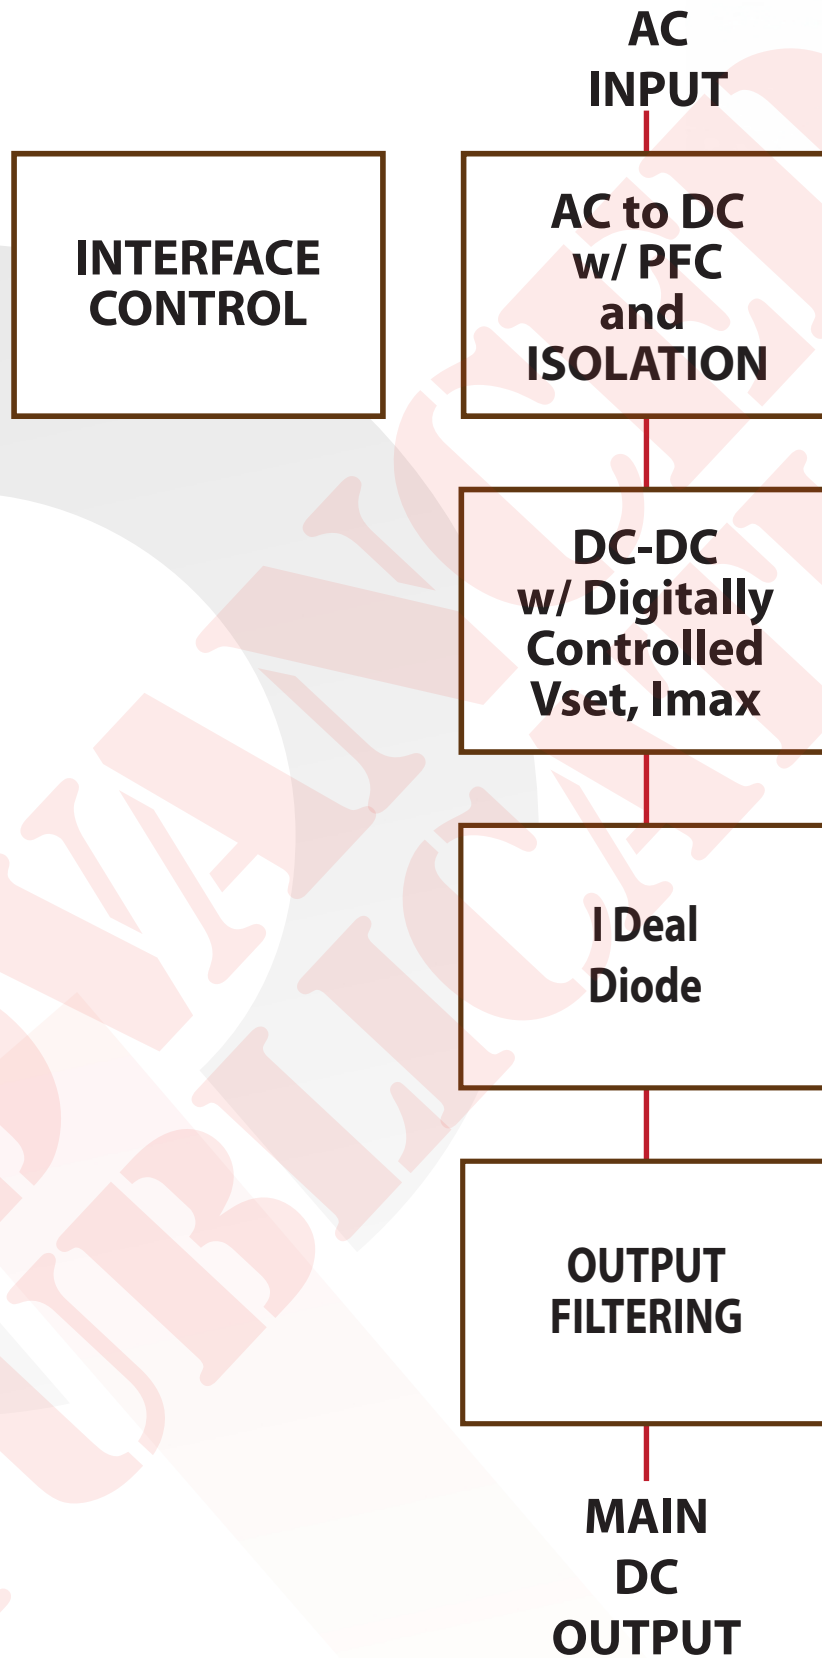



### High Density DB15 Female (15 Pin Connector)

Signal	PIN	Function
TX	<b>2</b>	RS232 DCE Device Transmit
RX	<b>3</b>	RS232 DCE Device Receive
GND	<b>4, 5</b>	Ground reference for all digital inputs and outputs
BATTLE_MODE	<b>6</b>	TTL-Input*, pull "low" to engage Battle Mode (disable internal over-temperature protection), has internal pull-up to +5V.
ACIN_GOOD	<b>7</b>	Open collector* output where "low" indicates AC Input voltage is within range
+5V	<b>8</b>	Vout with minimal current drive usable as a pull-up voltage for open collector output signals. Load must be <35mA
REMOTE_START	<b>12</b>	Drive this line "high" with $\geq 5\text{mA}$ to enable MPPS outputs
SHUTDOWN	<b>13</b>	Drive this line "high" with $\geq 5\text{mA}$ to disable MPPS outputs
OUT_OK	<b>14</b>	Open collector* output where "low" indicates Main DC Output voltage is within range
OVER_TEMP	<b>15</b>	Open collector* output where "low" indicates that the MPPS is at or above its maximum temperature



\*With an internal 50k Pull-up Resistor to 5V and ESD Protection Diodes.


#### Safety & Qualifications - PENDING

UL 60950-1

CAN/CSA C22.2 No.60950-1

EN 60950-1

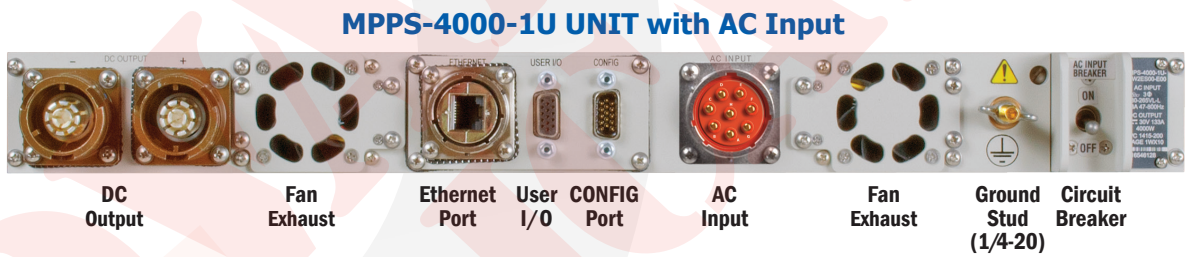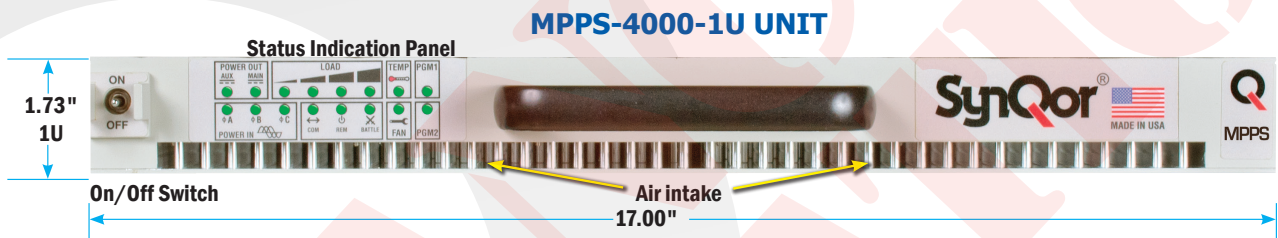

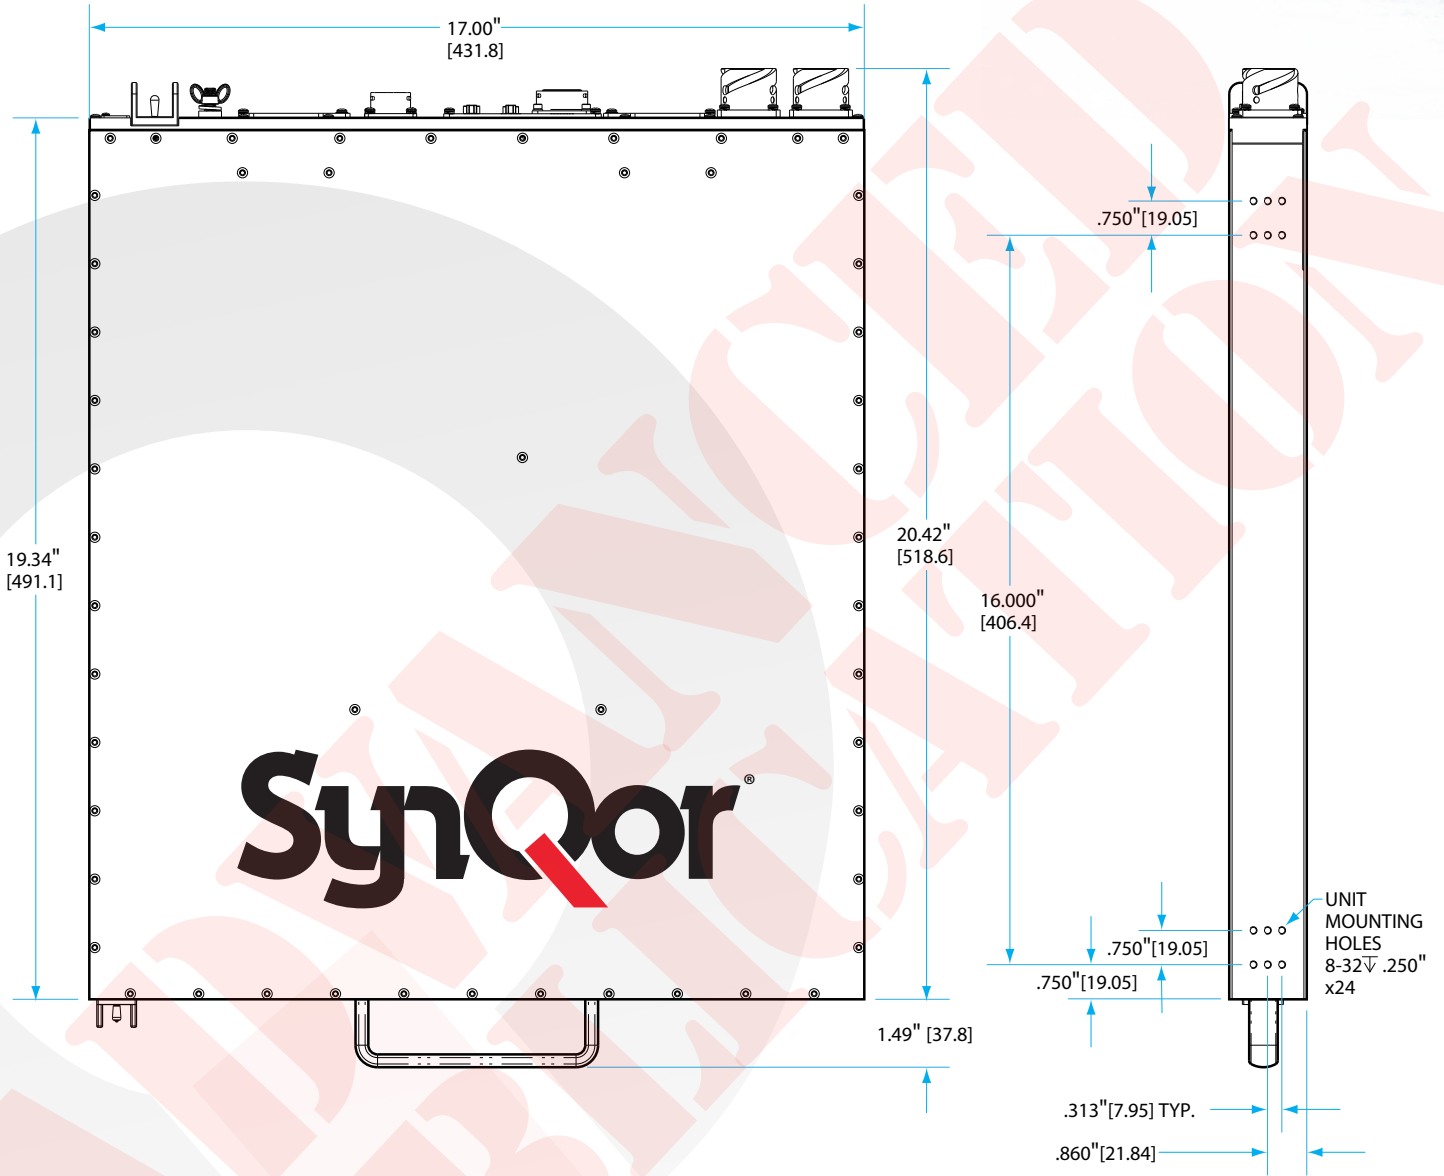



#### User Communications (I/O) Cables

HD DB15M to DB9F (RS232, 10')	SYN-9301
HD DB15M to DB15M (RS232 and Digital I/O, 10')	SYN-9305
Network SNMP (Sealed RJ45, 10')	SYN-9321
HD DB15F to HD DB15F (Synchronized Control of TWO Parallel Units, 3')	SYN-9322
HD DB15F to HD DB15F to HD DB15F (Synchronized Control of THREE Parallel Units, 3')	SYN-9323



#### Rail Kits

Slide Rail Kit	SYN-9002
Fixed Bracket Kit <sup>2</sup>	SYN-9038

#### Power Cables (10' long)

AC Input 30 A (18-8 MIL to NEMA L15-30P)	SYN-9115
AC Input 30 A (18-8 MIL Hardwire)	SYN-9116
DC Output Negative (Hardwire)	SYN-9176
DC Output Positive (Hardwire)	SYN-9177

#### Power Cables (3' long)

DC Output (MPS), DC Input (MINV), 3', Negative	SYN-9180
DC Output (MPS), DC Input (MINV), 3', Positive	SYN-9181

#### Rackmount Transit Cases

Transit Case, 3U, Gray, with Casters <sup>2</sup>	SYN-9410
Transit Case, 3U, Gray, No Casters <sup>2</sup>	SYN-9412

#### Notes:

- 1: Other Options also available, check the website or contact [power@synqor.com](mailto:power@synqor.com) for further information.
- 2: Fixed Bracket Kit (SYN-9038) with Transit Case (SYN-9410 or SYN-9412) is required for transit and ruggedized use.



Optional  
Rackmount Transit Case





# Ordering Information

Family	Output Power	Height	AC Input Phase #	AC Input Frequency	DC Output Voltage Range	Output Current Range	Network
<b>MPPS</b>	<b>4000:</b> 4000W	<b>1U:</b> 1.73"	<b>3:</b> 3 Phase	<b>W:</b> 47-800Hz	<b>28:</b> 0-35V <b>48:</b> 0-55V <b>72:</b> 0-80V	<b>150:</b> 0-150A <b>120:</b> 0-120A <b>078:</b> 0-78A	<b>E00:</b> Ethernet/SNMP

Contact your local sales representative.



Helios Power Solutions is SynQor authorized distributor in Australia, New Zealand, Saudi Arabia, Oman, Jordan, UAE, Qatar and Bahrain.

### PATENTS

SynQor holds numerous U.S. patents, one or more of which apply to most of its power conversion products. Any that apply to the product(s) listed in this document are identified by markings on the product(s) or on internal components of the product(s) in accordance with U.S. patent laws. SynQor's patents include the following:

5,999,417	6,222,742	6,545,890	6,594,159	6,894,468	6,896,526
6,927,987	7,050,309	7,072,190	7,085,146	7,119,524	7,269,034
7,272,021	7,272,023	7,558,083	7,564,702	7,765,687	7,787,261
8,023,290	8,149,597	8,493,751	8,644,027	9,143,042	

### WARRANTY

SynQor offers a 1 year limited warranty. Complete warranty information is listed on our website or is available upon request from SynQor.