


UFED40W SERIES

DC/DC Converter Single & Dual Output: 40 Watts

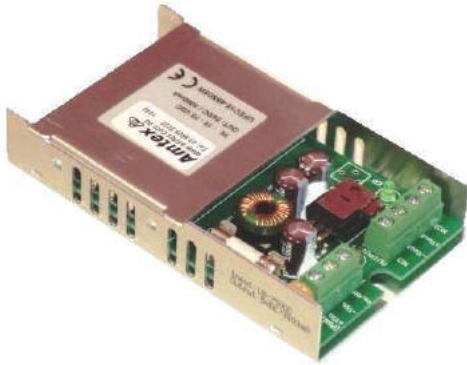

Features

- 4:1 wide Input range 9.5~36V, 18~75V & 43~160V
- **Rail EN50155** compliance
- Single and Dual output options
- High efficiency up to 91%
- Regulated output & Short circuit protection
- 1600VDC isolation
- Remote ON / OFF, Negative or Positive Logic
- High operating base plate temperature : -40°to +96°C
- Zero load operation
- Output voltage trim Singles
- Output LED
- Optional DIN Rail mounting - "DR"
- Option. Fully enclosed case - "EC" to model

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load uF (1)
UFED40-24S3P3W	9.5 ~ 36	3.3	10000	19	89	26600
UFED40-24S05W	9.5 ~ 36	5	8000	19	90	20000
UFED40-24S12W	9.5 ~ 36	12	3333	19	91	3900
UFED40-24S15W	9.5 ~ 36	15	2666	19	91	2600
UFED40-24S24W	9.5 ~ 36	24	1666	19	90	1300
UFED40-24D12W	9.5 ~ 36	±12	±1666	19	89	± 2600
UFED40-24D15W	9.5 ~ 36	±15	±1333	19	89	± 1600
UFED40-24D24W	9.5 ~ 36	±24	±833	19	90	±650
UFED40-48S3P3W	18 ~ 75	3.3	10000	14	89	26600
UFED40-48S05W	18 ~ 75	5	8000	14	90	20000
UFED40-48S12W	18 ~ 75	12	3333	14	91	3900
UFED40-48S15W	18 ~ 75	15	2666	14	91	2600
UFED40-48S24W	18 ~ 75	24	1666	14	90	1300
UFED40-48D12W	18 ~ 75	±12	±1666	14	89	± 2600
UFED40-48D15W	18 ~ 75	±15	±1333	14	89	± 1600
UFED40-48D24W	18 ~ 75	±24	±833	14	90	±650
UFED40-110S3P3W	43 ~ 160	3.3	10000	10	87	26600
UFED40-110S05W	43 ~ 160	5	8000	10	88	20000
UFED40-110S12W	43 ~ 160	12	3333	10	89.5	3900
UFED40-110S15W	43 ~ 160	15	2666	10	90	2600
UFED40-110S24W	43 ~ 160	24	1666	10	89	1300
UFED40-110D12W	43 ~ 160	±12	±1666	10	88	± 2600
UFED40-110D15W	43 ~ 160	±15	±1333	10	88	± 1600
UFED40-110D24W	43 ~ 160	±24	±833	10	90	±650

PART NUMBER STRUCTURE

UFED40 -	48	S	05	W -	N	EC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Remote Control Option	Assembly Option
	24: 9.5~36 48: 18~75 110: 43~160	S: Single D: Dual	3P3: 3.3 05: 5 12: 12 15: 15 24: 24 ----- 12: ±12 15: ±15 24: ±24	4:1	□: Positive logic N: Negative logic	□: No Assembly Option EC: Enclosed Mounting Type DR: Din Rail Mounting Type ED: Enclosed & Din Rail Mounting Type

UFED40W SERIES

DC/DC Converter Single & Dual Output: 40 Watts

INPUT SPECIFICATIONS

Parameter	Conditions	n.	Typ.	Max.	Unit	
Operating input voltage range		24Vin(nom)	9.5	24	36	VDC
		48Vin(nom)	18	48	75	
		110Vin(nom)	43	110	160	
Input fuse (slow blow)		24Vin(nom)	8			A
		48Vin(nom)	4			
		110Vin(nom)	2			
In-rush current			15		A	
Start-up voltage		24Vin(nom)		9.5		VDC
		48Vin(nom)		18		
		110Vin(nom)		43		
Shutdown voltage		24Vin(nom)	8			VDC
		48Vin(nom)	16			
		110Vin(nom)	40			
Start up time	Constant resistive load	Power up	100		ms	
Input surge voltage	1 second, max.	24Vin(nom)		50		VDC
		48Vin(nom)		100		
		110Vin(nom)		170		
Remote ON/OFF	Referenced to -Vin pin	Positive logic (Standard)				mA
		Negative logic (Option)				
		DC-DC ON				
		DC-DC OFF				
		DC-DC ON				
		DC-DC OFF				
		Input current of CTRL pin	-0.5		1	
		Remote off input current	5			

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	3.3Vout	-1.5		+1.5	%
	Others	-1.0		+1.0	
Line regulation	Low Line to High Line at Full Load	-0.5		+0.5	%
Load regulation	No Load to Full Load	3.3Vout, 5Vout		+1.5	%
		Others	-1.0		+1.0
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Voltage adjustability	Single output	3.3Vout, 5Vout, 12Vout		+10	%
		15Vout, 24Vout	-10		+20
Ripple and noise	Measured by 20MHz bandwidth	3.3Vout, 5Vout	75		mVp-p
		12Vout, 15Vout	100		
		24Vout	150		
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9	VDC
		5Vout		6.2	
		12Vout		15	
		15Vout		20	
		24Vout		30	
Output indicator					Green LED
Over load protection	% of Iout rated		150		%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600		VDC
		Input (Output) to Chassis	1600		
Isolation resistance	500VDC	1			GΩ
Isolation capacitance			4000		pF
Switching frequency		225	250	275	kHz
Safety meets					UL60950-1 EN60950-1 IEC60950-1 EN50155
Chassis material					Aluminum
Weight					110g (3.88oz)
MTBF	MIL-HDBK-217F, Full load				1.944 x 10 ⁶ hrs

UFED40W SERIES

DC/DC Converter Single & Dual Output: 40 Watts

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	without derating	-40		+63	°C
	with derating	+63		+96	
Over temperature protection	Case of DC/DC module		+115		°C
Storage temperature range		-40		+105	°C
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55022	Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ± 1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A

Note:

1. Test by minimum input and constant resistive load.


CHARACTERISTIC CURVES

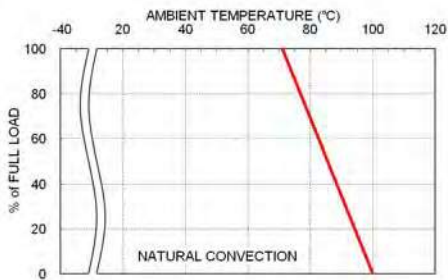

UFED40-48S05W Derating Curve



UFED40-48S05W Efficiency vs. Input Voltage

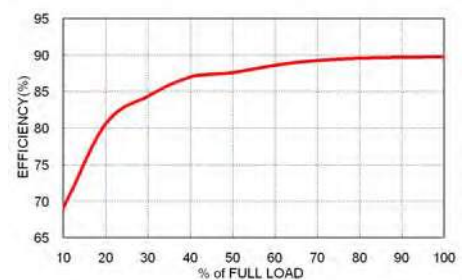


UFED40-48S05W Efficiency vs. Output Load

UFED40W SERIES

DC/DC Converter Single & Dual Output: 40 Watts

MECHANICAL DRAWINGS

CHASSIS MOUNTING TYPE - STD

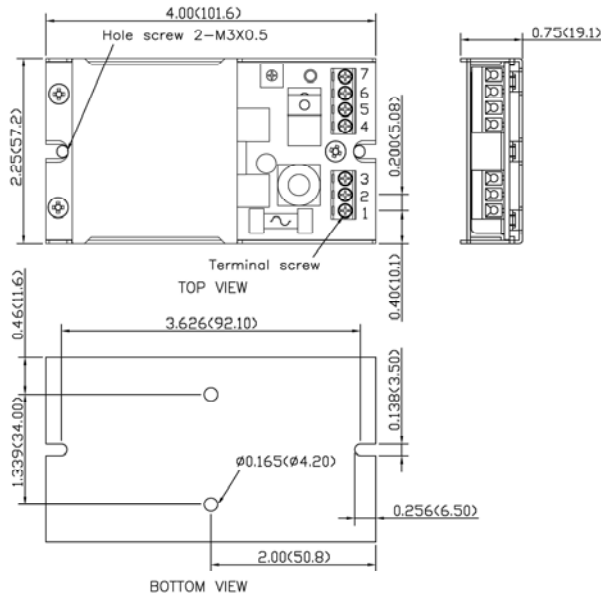


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	NC	NC
5	-Vout	-Vout
6	+Vout	Common
7	NC	+Vout

- ※ NC : No Connection
- ※ Screw terminals – wire range from 14 to 18 AWG

1. All dimensions in Inch (mm)
2. Tolerance : X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
3. Hole screw locked torque :
MAX 5.0kgf-cm (0.49N-m)
4. Terminal screw locked torque :
MAX 2.5kgf-cm (0.25N-m)

ENCLOSED MOUNTING TYPE: (OPTION -EC)

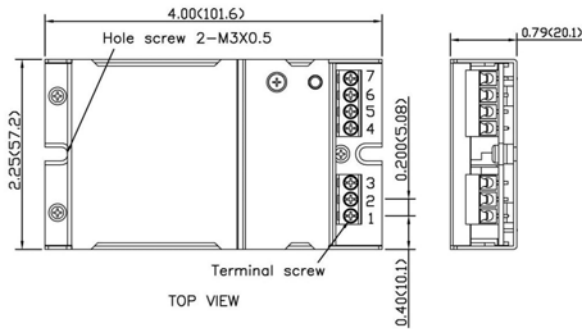

DIN RAIL MOUNTING TYPE: (OPTION - DR)

