

**3**  
YEARS  
WARRANTY

**ROHS**  
COMPLIANT

**REACH**  
COMPLIANT



Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV

UL US CB CE UK CA

**3000 VAC**  
Reinforced  
Insulation

**4 : 1**  
Wide  
Input  
Range

Internal  
EN55032  
Class  
Filter **A**

**LOW**  
Standby  
Power

**NO**  
Min. Load  
Required

REMOTE  
**ON**  
**OFF**

**OCP**

**OTP**

**OVP**

**SCP**

**UVP**

### PART NUMBER STRUCTURE

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Remote On/Off Options
RHM20 -	<b>110</b>	<b>S</b>	<b>05</b>	<b>W</b>	<b>N</b>
	110: 36~160	S: Single	05: 5 5P1: 5.1 12: 12 15: 15 24: 24	4:1	□: Positive logic N: Negative logic
		D: Dual	05: ±5 12: ±12 15: ±15		

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
RHM20-110S05W	36 ~ 160	5	4000	10	90.5	5000
RHM20-110S5P1W	36 ~ 160	5.1	4000	10	90.5	5000
RHM20-110S12W	36 ~ 160	12	1670	10	88.5	850
RHM20-110S15W	36 ~ 160	15	1330	10	89.5	700
RHM20-110S24W	36 ~ 160	24	833	10	88.5	220
RHM20-110D05W	36 ~ 160	±5	±2000	10	86	±2500
RHM20-110D12W	36 ~ 160	±12	±833	10	88.5	±500
RHM20-110D15W	36 ~ 160	±15	±667	10	89.5	±350

INPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	110Vin(nom)		36	110	160	VDC
Start up voltage	110Vin(nom)					36 VDC
Shutdown voltage	110Vin(nom)		32	34	35.8	VDC
Start up time	Constant resistive load	Power up			30	60 ms
		Remote ON/OFF			30	60 ms
Input surge voltage	1 second, max.	110Vin(nom)				200 VDC
Input filter			Pi type			
Remote ON/OFF	Referred to -Vin pin	Positive logic (Standard)	DC-DC ON			Open or 3 ~ 12VDC
			DC-DC OFF			Short or 0 ~ 1.2VDC
		Negative logic (Option)	DC-DC ON			Short or 0 ~ 1.2VDC
			DC-DC OFF			Open or 3 ~ 12VDC
		Input current of Ctrl pin	-0.5			0.5 mA
		Remote off input current			3	mA

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0			+1.0 %
Line regulation	Low Line to High Line at Full Load		-0.2			+0.2 %
Load regulation	No Load to Full Load	Single	-0.5			+0.5 %
		Dual	-1.0			+1.0 %
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0			+5.0 %
Voltage adjustability	Single output	Other	-10			+10 %
		15Vout, 24Vout	-10			+20 %
Ripple and noise	Measured by 20MHz bandwidth With a 1µF/50V X7R MLCC	5Vout, 5.1Vout			75	mVp-p
		12Vout, 15Vout			100	
		24Vout			150	
Temperature coefficient			-0.02			+0.02 %/°C
Transient response recovery time	25% load step change				250	µs
Over voltage protection	Zener diode clamp	5Vout, 5.1Vout			6.2	VDC
		12Vout			15	
		15Vout			20	
		24Vout			30	
Over load protection	% of lout rated; Hiccup mode				150	%
Short circuit protection			Continuous, automatics recovery			

### GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation) Input to Output	3000			VAC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1000	pF
Switching frequency		250	275	310	kHz
Safety approvals	IEC/ EN/ UL62368-1				UL:E193009 CB:UL(Demko)
Standard approvals	EN50155 EN45545-2				
Case material					Non-conductive black plastic
Base material					Non-conductive black plastic
Potting material					Silicone (UL94 V-0)
Weight					24g (0.85oz)
MTBF	MIL-HDBK-217F, Full load				1.558×10 <sup>6</sup> hrs


### ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Over temperature protection					Internal temperature sensor
Storage temperature range		-55		+125	°C
Thermal impedance			11.48		°C/W
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH


### EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55032, EN50121-3-2 Without external component With external components	Class A Class B
EMS	EN55035, EN50121-3-2	
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ± 2kV  RHM20-110□□□W With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 220μF/200V in parallel) and a TVS(SMDJ170A, 170V, 3000Watt peak pulse power) in parallel.	Perf. Criteria A
Conducted immunity	EN61000-4-6 10Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A


## CHARACTERISTIC CURVE

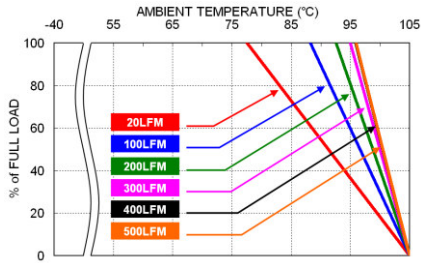

RHM20-110S05W Derating Curve

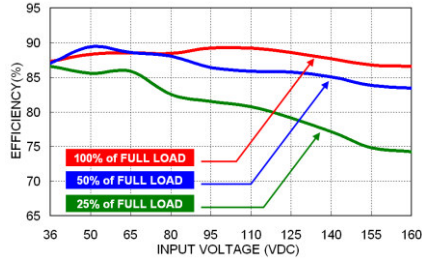

RHM20-110S05W Efficiency vs. Input Voltage

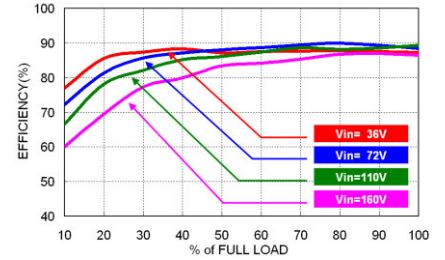

RHM20-110S05W Efficiency vs. Output Load


## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used. This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture. To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
RHM20-110□□□W	1	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

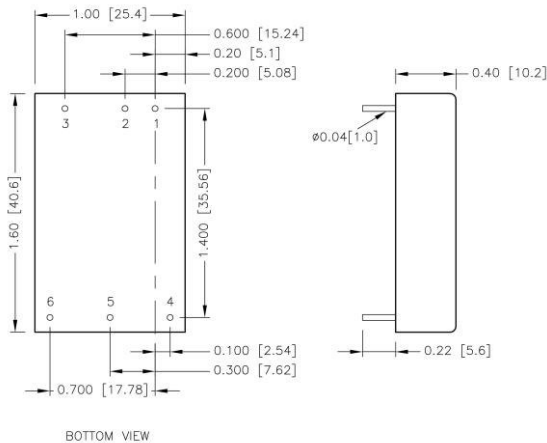


### PIN CONNECTION

PIN	SINGLE	DUAL
1	+ Vin	+ Vin
2	- Vin	- Vin
3	Ctrl	Ctrl
4	+ Vout	+ Vout
5	- Vout	Com
6	Trim	- Vout

- All dimensions in inch [mm]
- Tolerance :x.xxx±0.02 [x.x±0.5]  
x.xxx±0.010 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

### RECOMMENDED PAD LAYOUT

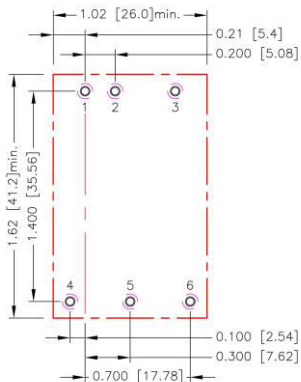


All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3.4.5.6:  $\Phi 0.051[1.30]$   
 Top view pad 1.2.3.4.5.6:  $\Phi 0.064[1.63]$   
 Bottom view pad 1.2.3.4.5.6:  $\Phi 0.102[2.60]$

### THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed “Maximum case temperature”. When operating, adequate cooling must be provided to maintain the test point temperature at or below “Maximum case temperature”. You can limit this temperature to a lower value for extremely high reliability.

The unit will shutdown if the thermal reference point exceeds 115°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restarts after it cools down.

Thermal test condition with vertical direction by natural convection (20LFM).

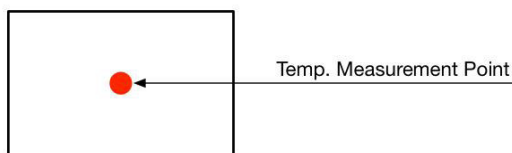

TOP VIEW

## OUTPUT VOLTAGE ADJUSTMENT

It allows the user to increase or decrease the output voltage of the module.

This is accomplished by connecting an external resistor between the Trim pin and either the +Vout or -Vout pins.

With an external resistor between the Trim and -Vout pin, the output voltage increases.

With an external resistor between the Trim and +Vout pin, the output voltage decreases.

The external Trim resistor needs to be at least 1/8W of rated power.

### Trim Up Equation

$$R_U = \left[ \frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

### Trim Down Equation

$$R_D = \left[ \frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


### Trim Constants

Module	G	H	K	L
RHM20-110S05W	5100	2050	2.5	2.5
RHM20-110S5P1W	5100	2050	2.6	2.5
RHM20-110S12W	10000	5110	9.5	2.5
RHM20-110S15W	10000	5110	12.5	2.5
RHM20-110S24W	56000	13000	21.5	2.5

### EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



#### □□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.05	5.10	5.15	5.20	5.25	5.30	5.350	5.40	5.45	5.50
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

#### □□S5P1W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.151	5.202	5.253	5.304	5.355	5.406	5.457	5.508	5.559	5.610
RU (kΩ)	248.440	123.195	81.447	60.573	48.048	39.698	33.734	29.261	25.782	22.999

#### □□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

#### □□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.65	16.8	16.95	17.1	17.25	17.4	17.55	17.7	17.85	18
RU (kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223


#### □□S24W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.64	26.88	27.12	27.36	27.60	27.84	28.08	28.32	28.56	28.80
RU (kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

### OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



#### □□S05W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50
RD (k $\Omega$ )	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

#### □□S5P1W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.049	4.998	4.947	4.869	4.845	4.794	4.743	4.692	4.641	4.590
RD (k $\Omega$ )	253.350	123.095	79.677	57.968	44.942	36.258	30.056	25.404	21.786	18.891

#### □□S12W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.80
RD (k $\Omega$ )	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

#### □□S15W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50
RD (k $\Omega$ )	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

#### □□S24W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.76	23.52	23.28	23.04	22.80	22.56	22.32	22.08	21.84	21.60
RD (k $\Omega$ )	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667